RNAV (GPS) RWY 10

BOGGS FIELD (USW)

WAAS	APP CRS	Rwy Idg	4549
CH 93632	100°	TDZE	928
W10A		Apt Elev	928

T
NA

Circling to Rwy 28 NA at night. Baro-VNAV NA when using Charleston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (2°F) or above 54°C (130°F). When local altimeter setting not received, use Charleston altimeter setting and increase all DA 75 feet and all MDA 80 feet. Increase LPV all Cats visibility ⅛ mile, LNAV Cat B visibility ¼ mile, Cat C/D visibility ½ mile and Circling Cat B/C/D visibility ¼ mile. DME/DME RNP-0.3 NA. VDP NA with Charleston altimeter setting. Helicopter visibility reduction below ¾ SM NA. Procedure NA at night.

MISSED APPROACH: Climb to 3200 direct RAPGE and hold.

AWOS-3	CHARLESTON APP CON	UNICOM
118.575	124.1 269.125	122.725 (CTAF) L

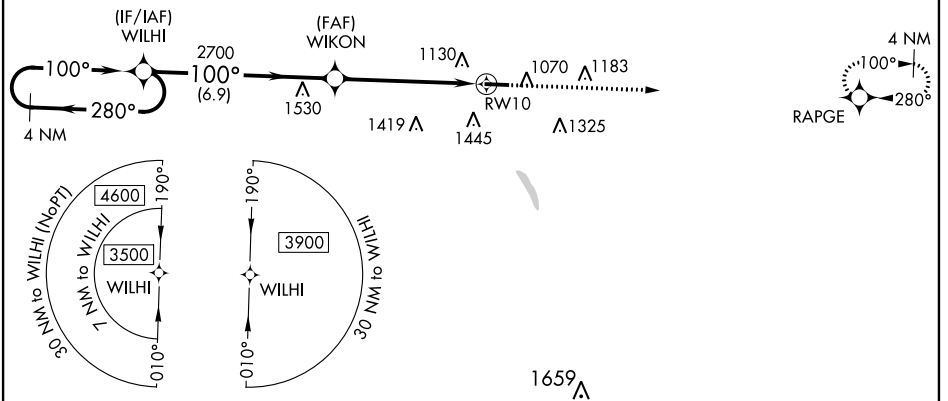

ELEV 928 TDZE 928

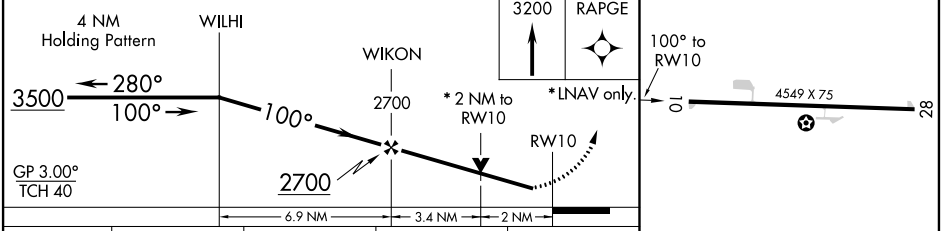

CATEGORY	A	B	C	D
LPV DA	1178-1	250 (300-1)		
LNAV/VNAV DA	1661-3	733 (800-3)		
LNAV MDA	1620-1	692 (700-1)	1620-2	692 (700-2)
CIRCLING	1620-1	692 (700-1)	1760-2½ 832 (900-2½)	1760-2¾ 832 (900-2¾)

MIRL Rwy 10-28 L

NE-4, 03 DEC 2020 to 31 DEC 2020
NE-4, 03 DEC 2020 to 31 DEC 2020