

WAAS
CH **99609**
W31A

APP CRS
305°

Rwy Idg
TDZE **6147**
Apt Elev **6160**

RNAV (GPS) RWY 31

CHEYENNE RGNL/JERRY OLSON FIELD (C'YS)

RNP APCH.

T

A

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 45°C.
ASR/PAR

MISSED APPROACH: Climb to 6600, then climbing left turn to 10400 direct SENSE and hold, continue climb-in-hold to 10400.


ATIS
134.425 278.3

CHEYENNE APP CON★
124.55 263.075

CHEYENNE TOWER★
118.7(CTAF) 257.8

GND CON
121.9 254.275

UNICOM
122.95

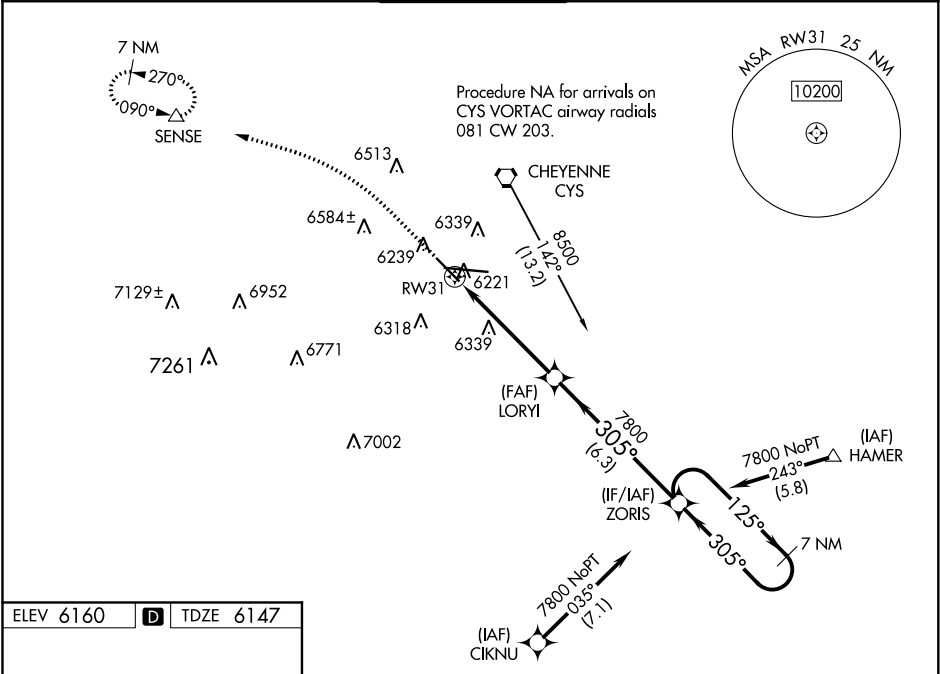

6213
6218
6189
6256
6221
6171
6280

TWR
6256
0.4% DOWN
0.7% UP
9270 X 150
305° to RW31

6600
10400
SENSE

*LNAV only

*1.3 NM to RW31

RW31

LORYI 7800

ZORIS

7 NM Holding Pattern

125°
305°
7800

GP 3.00°
TCH 55

CATEGORY	A	B	C	D
LPV DA	6397-3/4 250 (300-3/4)			
LNAV/VNAV DA	6458-7/8 311 (300-7/8)			
LNAV MDA	6600-1 453 (500-1)		6600-13/8 453 (500-13/8)	
CIRCLING	6640-1 480 (500-1)		6900-2 740 (800-2)	6920-21/2 760 (800-21/2)

REIL Rwy 9, 13 and 31

HIRL Rwy 9-27

MIRL Rwy 13-31