

|  |                        |   |
|--|------------------------|---|
| WAAS<br>CH <b>82308</b><br><b>W21A</b> | APP CRS<br><b>207°</b> | Rwy Idg <b>5500</b><br>TDZE <b>1276</b><br>Apt Elev <b>1276</b> |
|--|------------------------|---|

RNAV (GPS) RWY 21

EPHRATA MUNI (EPH)

RNP APCH.


▼









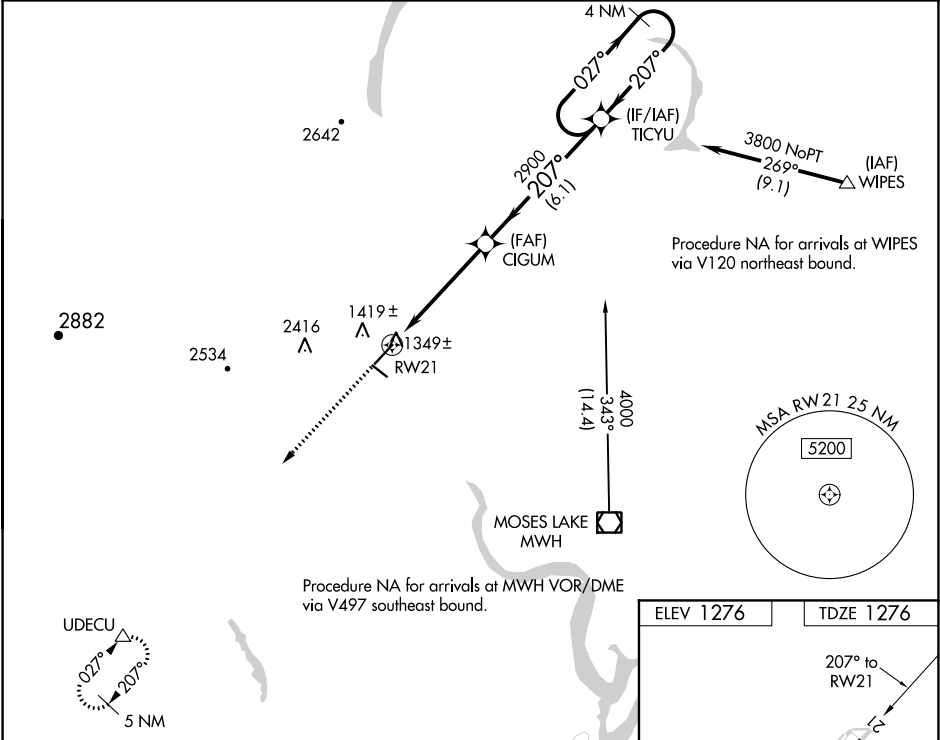



▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 46°C. VDP and Baro-VNAV NA when using Moses Lake/Grant County Intl altimeter setting. When local altimeter setting not received, use Moses Lake/Grant County Intl altimeter setting and increase all DA/MDA 40 feet; increase visibility LPV all Cats, and LNAV Cats C and D ¼ SM.

MISSED APPROACH: Climb to 4500 direct UDECU and hold.

|                        |   |                                 |
|------------------------|---|---------------------------------|
| ASOS<br><b>135.775</b> | GRANT COUNTY APP CON *<br><b>126.4 379.95</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|------------------------|---|---------------------------------|



|  |   |   |   |   |
|--|---|---|---|---|
| 4500   | UDECU   | VGSI and RNAV glidepath not coincident<br>(VGSI Angle 3.00/TCH 40).                 |   | 4 NM<br>Holding Pattern   |
|   |  |   |   |   |
| *LNAV only   | *2.2 NM to RW21   | CIGUM   | TICYU   |   |
|  |  |  |  |   |
|  | 2.2 NM  | 2.7 NM  | 6.1 NM  |   |
|  |   |  |  |  |
|  |   |  |  |  |
|  |   |   |   | GP 3.00°<br>TCH 51  |
| CATEGORY   | A   | B   | C   | D   |
| LPV DA   | 1526-¾ 250 (300-¾)  |   |   |   |
| LNAV/<br>VNAV DA   | 2171-4 895 (900-4)  |   |   |   |
| LNAV MDA   | 2020-1<br>744 (800-1)   | 2020-1¼<br>744 (800-1¼)   | 2020-2¼<br>744 (800-2¼)   | 2020-2½<br>744 (800-2½)   |

