RNAV (GPS) RWY 13

FRANK WILEY FIELD (MLS)

WAAS	APP CRS	Rwy Idg	5623
CH 97340	126°	TDZE	2630
W13A		Apt Elev	2630

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C (-11°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Forsyth altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Forsyth altimeter setting; increase LPV and LNAV/VNAV DA to 2968 and all visibility ⅛ mile. Increase all MDA 100 feet and all Cat C and D visibility ¼ mile.

MISSED APPROACH: Climb to 6000 direct BOKDE and hold, continue climb-in-hold to 6000.

ASOS	SALT LAKE CENTER	UNICOM
135.575	126.85 305.2	123.0 (CTAF) L

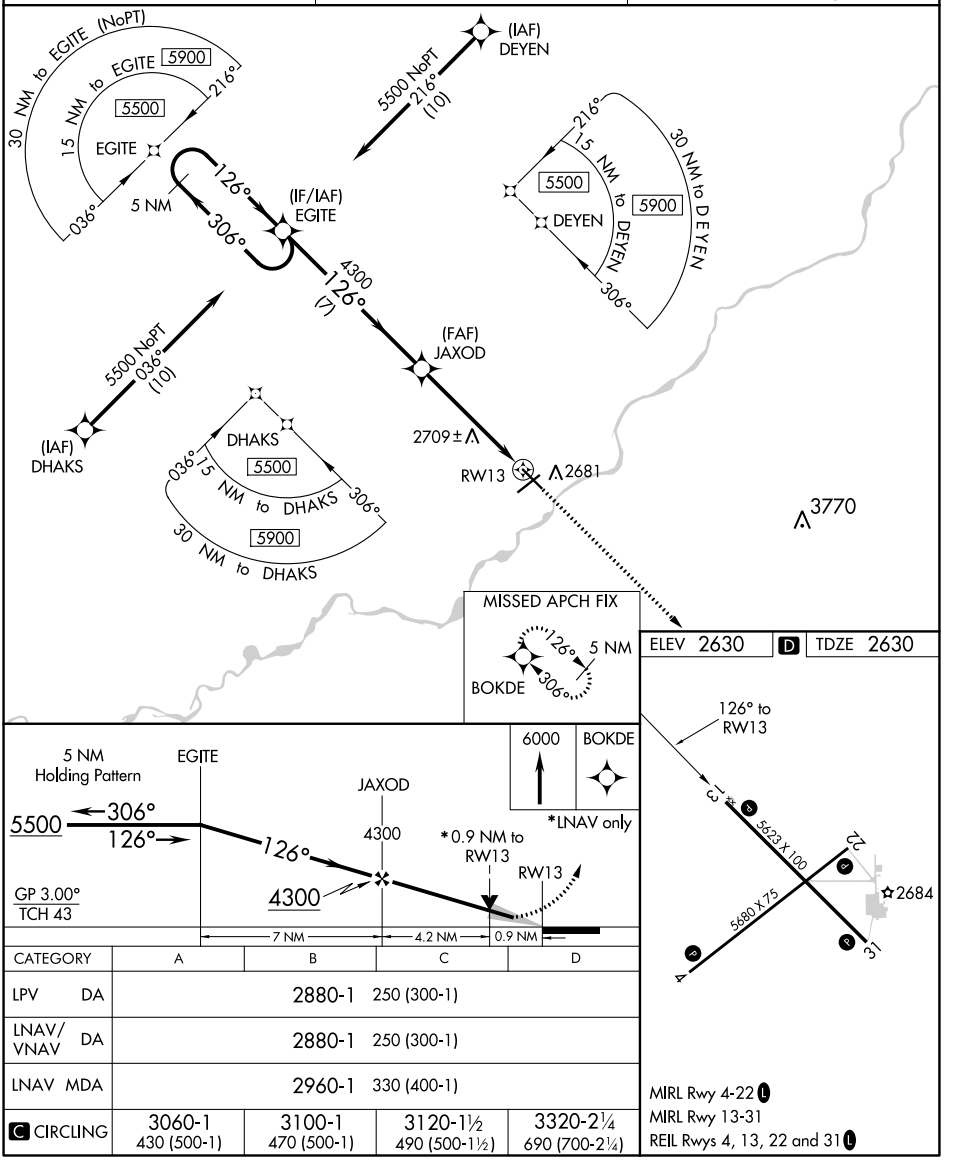

CATEGORY	A	B	C	D
LPV DA	2880-1 250 (300-1)			
LNAV/VNAV DA	2880-1 250 (300-1)			
LNAV MDA	2960-1 330 (400-1)			
C CIRCLING	3060-1 430 (500-1)	3100-1 470 (500-1)	3120-1½ 490 (500-1½)	3320-2¼ 690 (700-2¼)

MIRL Rwy 4-22 L
MIRL Rwy 13-31
REIL Rwys 4, 13, 22 and 31 L

NW-1, 03 DEC 2020 to 31 DEC 2020
NW-1, 03 DEC 2020 to 31 DEC 2020