APP CRS	Rwy Idg	11014
063°	TDZE	256
	Apt Elev	298

RNAV (RNP) Z RWY 6L

GUAM INTL (GUM)(PGUM)

For uncompensated Baro-VNAV systems, procedure NA below 19°C (66°F) or above 48°C (119°F). GPS required. For inoperative MALSR, increase RNP 0.30* visibility to 1 mile and RNP 0.30 visibility to 1½ mile.
*Missed approach requires a minimum climb of 276 feet per NM to 1400.

MALSR

MISSED APPROACH: Climb to 3000 via track 063° to WABOX and hold.

ATIS	GUAM CERAP	AGANA TOWER	GND CON	CLNC DEL
119.0	119.8 269.0	118.1 340.2	121.9 336.4	121.9

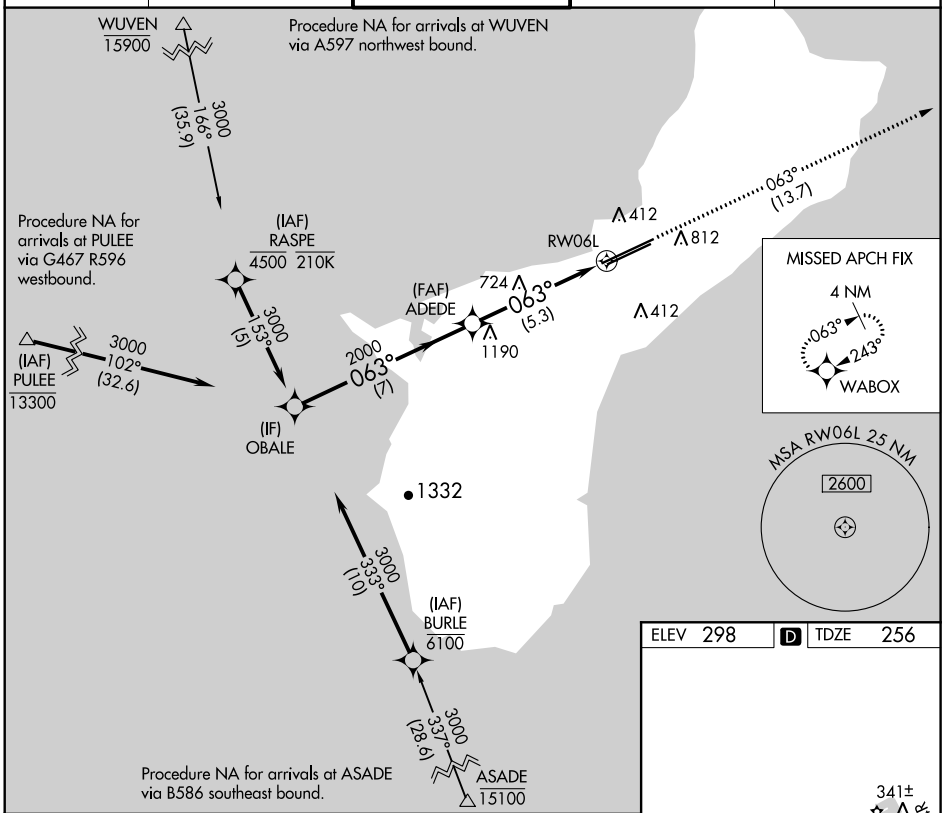

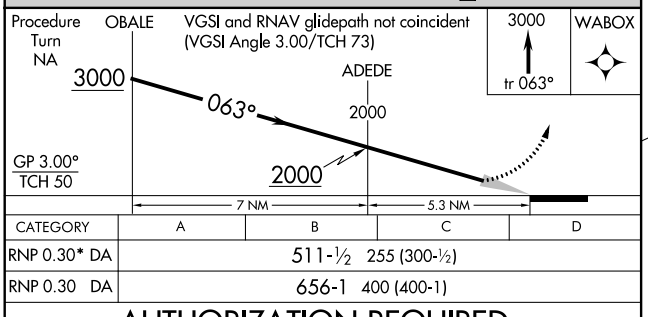

CATEGORY	A	B	C	D
RNP 0.30* DA	511-½ 255 (300-½)			
RNP 0.30 DA	656-1 400 (400-1)			

AUTHORIZATION REQUIRED

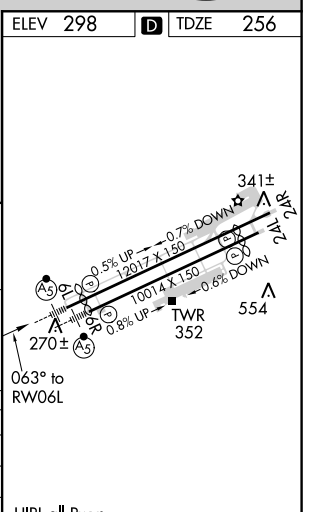

PAC, 05 NOV 2020 to 31 DEC 2020
PAC, 05 NOV 2020 to 31 DEC 2020