RNAV (GPS) RWY 4

WALNUT RIDGE RGNL (ARG)

WAAS	APP CRS	Rwy Idg	6001
CH 77825	044°	TDZE	279
W04A		Apt Elev	279

Baro-VNAV NA when using Jonesboro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. VDP NA with Jonesboro altimeter setting. When local altimeter setting not received, use Jonesboro altimeter setting and increase all DA 54 feet and all MDA 60 feet; increase LPV and LNAV/VNAV all Cats visibility ¼ mile and LNAV Cat C and D visibility ⅛ mile.

MALSF

MISSED APPROACH: Climb to 2700 direct ESEGE and hold.

AWOS-3PT	MEMPHIS CENTER	UNICOM
135.925	120.075 289.4	122.8 (CTAF) L

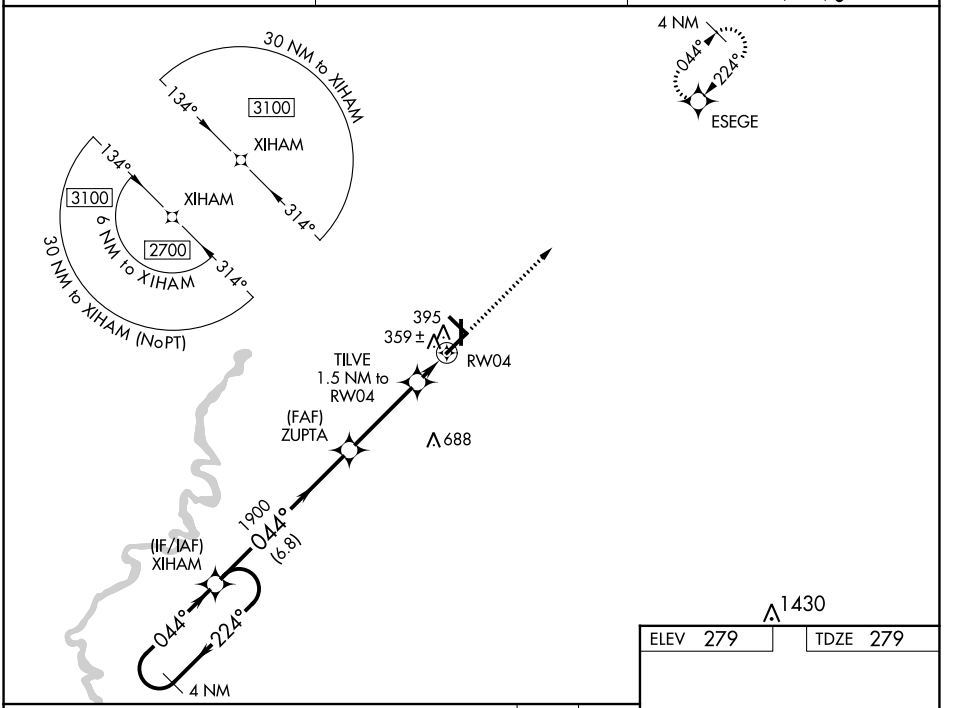

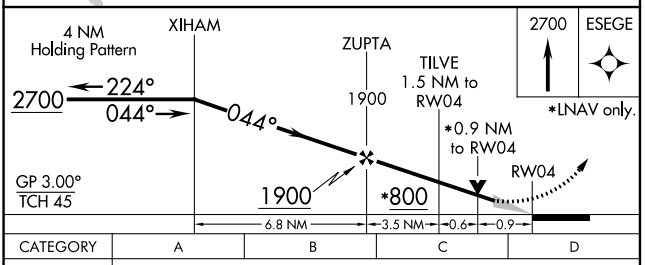

CATEGORY	A	B	C	D
LPV DA	529- ¾	250 (300- ¾)		
LNAV/VNAV DA	529- ¾	250 (300- ¾)		
LNAV MDA	620-1	341 (400-1)		
CIRCLING	760-1 481 (500-1)		760-1½ 481 (500-1½)	840-2 561 (600-2)

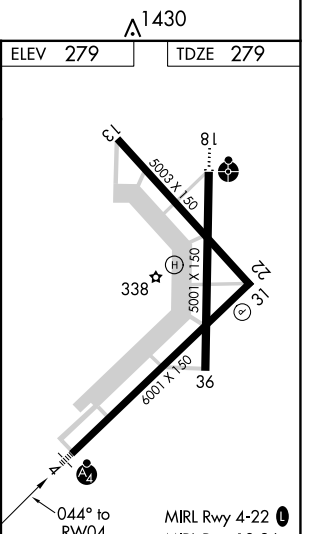

SC-1, 03 DEC 2020 to 31 DEC 2020
SC-1, 03 DEC 2020 to 31 DEC 2020