WAAS	APP CRS		
CH **40008**	**176°**	Rwy Idg	**8500**
W17B		TDZE	**545**
		Apt Elev	**607**

RNAV (GPS) RWY 17L

DALLAS-FORT WORTH INTL (DFW)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with Rwy 17C/R and Rwy 18L/R. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 1020 then climbing left turn to 3000 direct TACKE and hold.

D-ATIS	REGIONAL APP CON	DFW TOWER	GND CON	CLNC DEL	CPDLC
ARR **123.775**	**119.4**	**126.55 127.5** EAST	**121.65 121.8** EAST	**128.25**	
DEP **135.925**		**124.15 134.9** WEST	**121.85** WEST		

RADAR REQUIRED

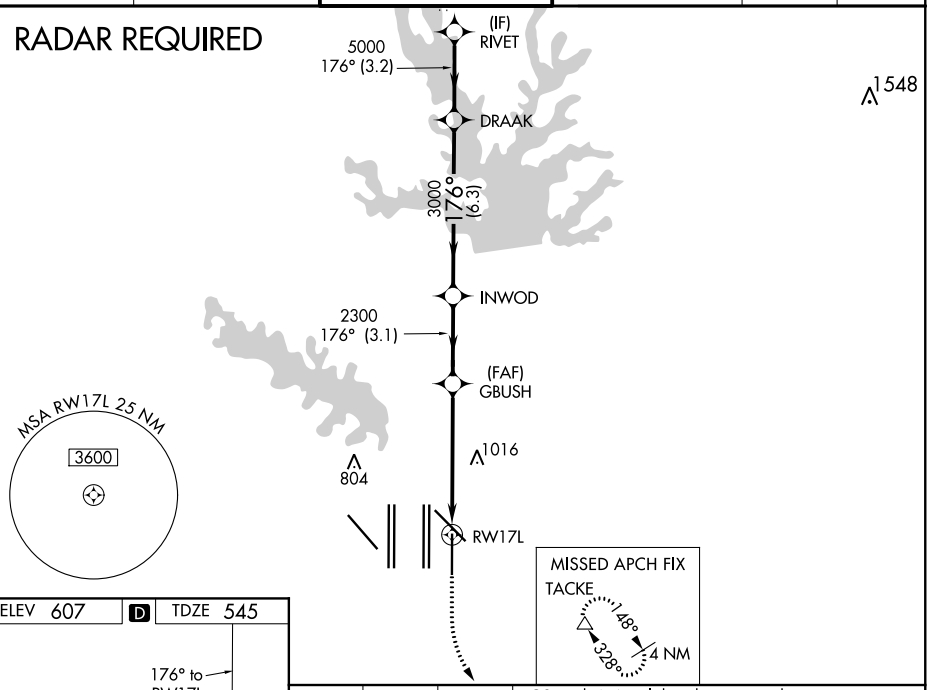

ELEV 607 D TDZE 545



HIRL all Rwys
REIL Rwys 13L and 31L
TDZ/CL all Rwys except 13L and 31L

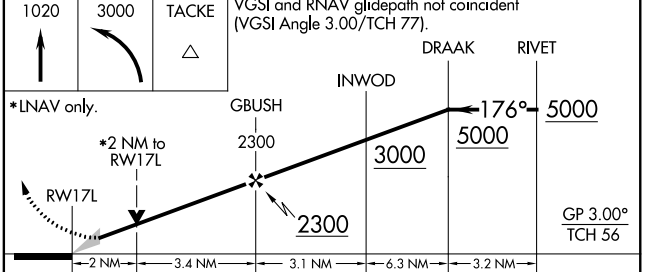

CATEGORY	A	B	C	D
LPV DA	745/18 200 (200-½)			
LNAV/VNAV DA	1063/60 518 (500-1¼)			
LNAV MDA	1240/24 695 (700-½)		1240-1½ 695 (700-1½)	

SC-2, 03 DEC 2020 to 31 DEC 2020
SC-2, 03 DEC 2020 to 31 DEC 2020