# RNAV (GPS) RWY 31

WINKLER COUNTY (INK)

| WAAS | APP CRS | Rwy Idg | 5003 |
|---|---|---|---|
| CH 56233 | 313° | TDZE | 2818 |
| W31A | | Apt Elev | 2822 |

Baro-VNAV NA when using Pecos altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Pecos altimeter setting. When local altimeter setting not received, use Pecos altimeter setting and increase all DA 95 feet and all MDA 100 feet. Increase LPV all Cats visibility ¼ mile, LNAV/VNAV all Cats visibility ⅜ mile, LNAV Cat B visibility ¼ mile, LNAV Cat C visibility ½ mile and Circling Cats B and C visibility ¼ mile.

MISSED APPROACH: Climb to 5000 direct AHASS and hold.

| AWOS-3 | FORT WORTH CENTER | UNICOM |
|---|---|---|
| 118.325 | 133.1 298.95 | 123.0 (CTAF) L |

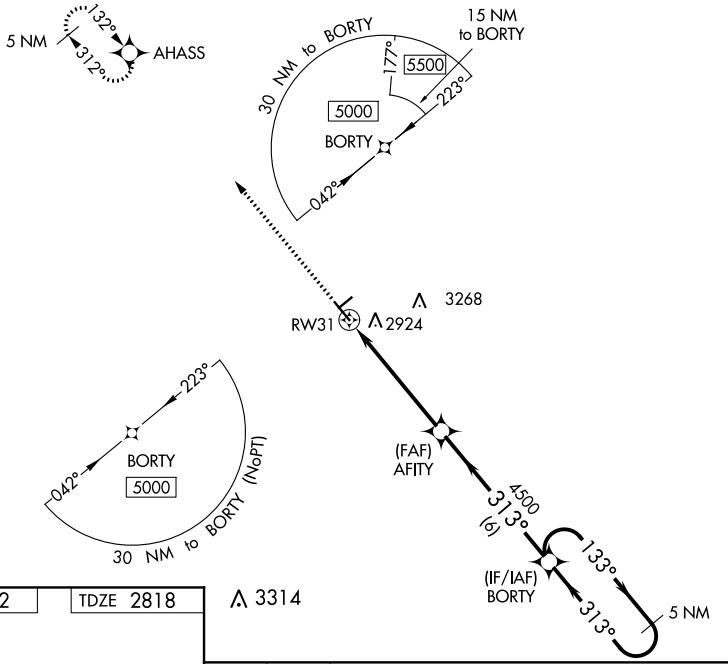


ELEV 2822 TDZE 2818

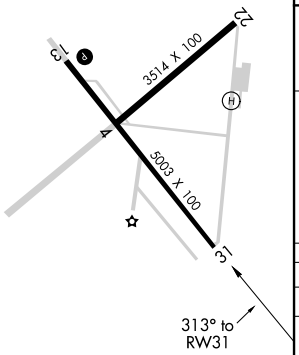


MIRL Rwys 4-22 and 13-31 L

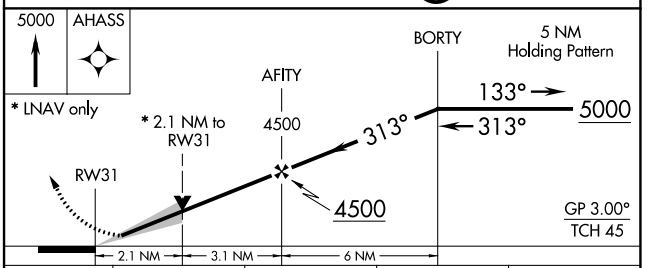


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 3018-¾ 200 (200-¾) | | | NA |
| LNAV/VNAV DA | 3130-1 312 (400-1) | | | NA |
| LNAV MDA | 3520-1 702 (700-1) | | 3520-2 702 (700-2) | NA |
| CIRCLING | 3520-1 698 (700-1) | | 3580-2¼ 758 (800-2¼) | NA |



SC-3, 03 DEC 2020 to 31 DEC 2020
SC-3, 03 DEC 2020 to 31 DEC 2020