WAAS	APP CRS	Rwy Idg	5601
CH 86232	126°	TDZE	593
W13A		Apt Elev	595

RNAV (GPS) RWY 13

SAN MARCOS RGNL (HYI)

T A Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). When local altimeter setting not received, use New Braunfels altimeter setting and increase all DA 43 feet and all MDA 60 feet; increase LNAV/VNAV all Cats, LNAV Cat C/D/E and Circling Cat C/D visibility ¼ mile. For inoperative MALSR, increase LPV Cat E visibility to ¾, LNAV/VNAV Cat E visibility to 1⅛ and LNAV Cat E visibility to 1½ . For inoperative MALSR when using New Braunfels altimeter setting, increase LPV Cat E visibility to ¾, LNAV/VNAV Cat E visibility to 1¼ and LNAV Cat E visibility to 1¾ . Circling NA for Cat E SW of Rwy 13-31. DME/DME RNP-0.3 NA. VDP NA with New Braunfels altimeter setting.

MALSR

MISSED APPROACH: Climb to 3000 direct HODAL and hold.

ATIS ★	AUSTIN APP CON	SAN MARCOS TOWER ★	GND CON	CLNC DEL	CLNC DEL
120.825	119.0 370.85	126.825 (CTAF) L	120.125	120.125	121.35 (when twr closed)

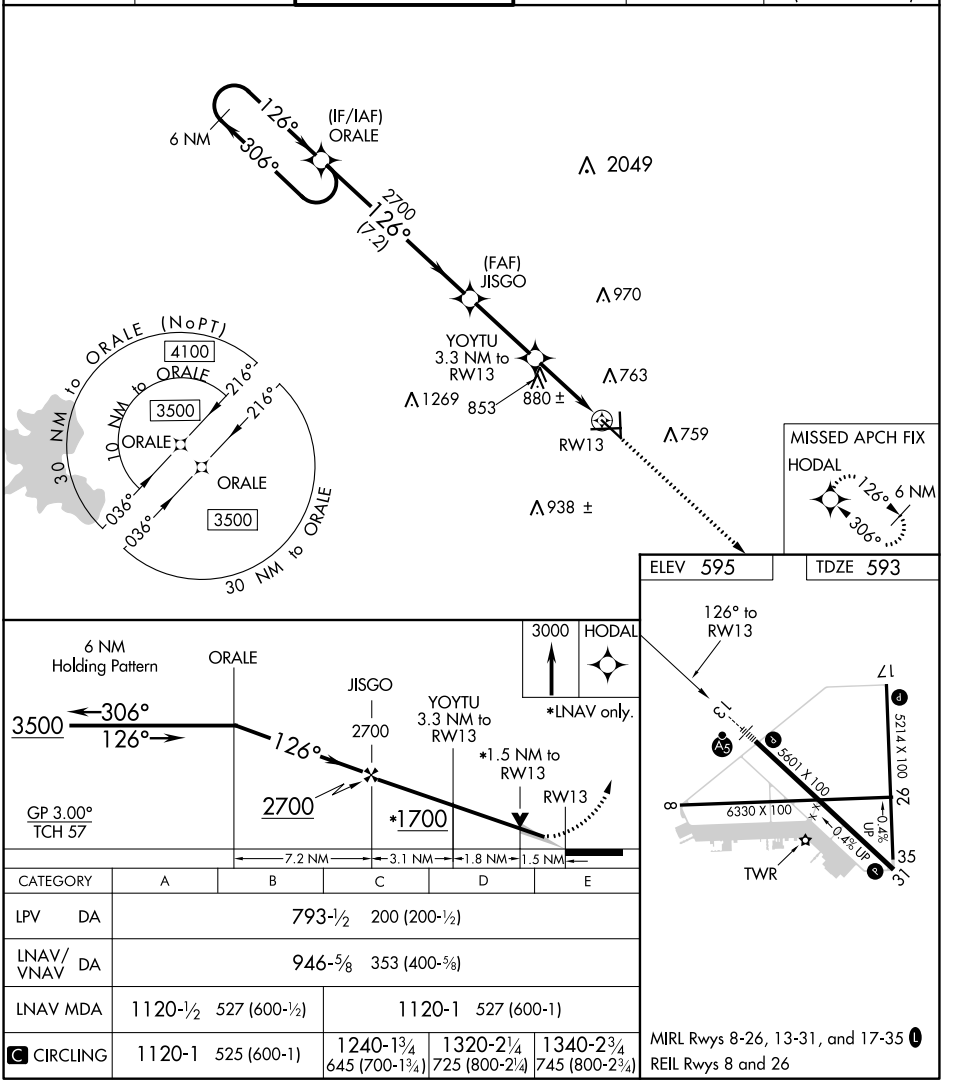

CATEGORY	A	B	C	D	E
LPV DA	793-½ 200 (200-½)				
LNAV/VNAV DA	946-⅝ 353 (400-⅝)				
LNAV MDA	1120-½ 527 (600-½)		1120-1 527 (600-1)		
C CIRCLING	1120-1 525 (600-1)		1240-1¾ 645 (700-1¾)	1320-2¼ 725 (800-2¼)	1340-2¾ 745 (800-2¾)

MIRL Rwys 8-26, 13-31, and 17-35 L
REIL Rwys 8 and 26

SC-3, 03 DEC 2020 to 31 DEC 2020
SC-3, 03 DEC 2020 to 31 DEC 2020