

| | | |
|-------------|----------|-------------|
| APP CRS | Rwy Idg | 7510 |
| 312° | TDZE | 43 |
| | Apt Elev | 46 |

RNAV (RNP) Z RWY 31
CORPUS CHRISTI INTL (CRP)

T For uncompensated Baro-VNAV systems, procedure NA below -1°C (31°F) or above 54°C (130°F). GPS and RF required. For inop MALSR, increase RNP 0.14 all Cats visibility to 7/8 mile.


*Missed approach requires minimum climb of 335 feet per NM to 500.

MALSr




MISSED APPROACH: Climb to 2000 on track 312° to ATHIS and hold.

| | | | | |
|---------------|---------------------------------|-----------------------------|-------------------------|--------------------|
| ATIS 126.8 | CORPUS APP CON 120.9 348.725 | CORPUS TOWER 119.4 257.8 | GND CON 121.9 269.15 | CLNC DEL 118.55 |
|---------------|---------------------------------|-----------------------------|-------------------------|--------------------|

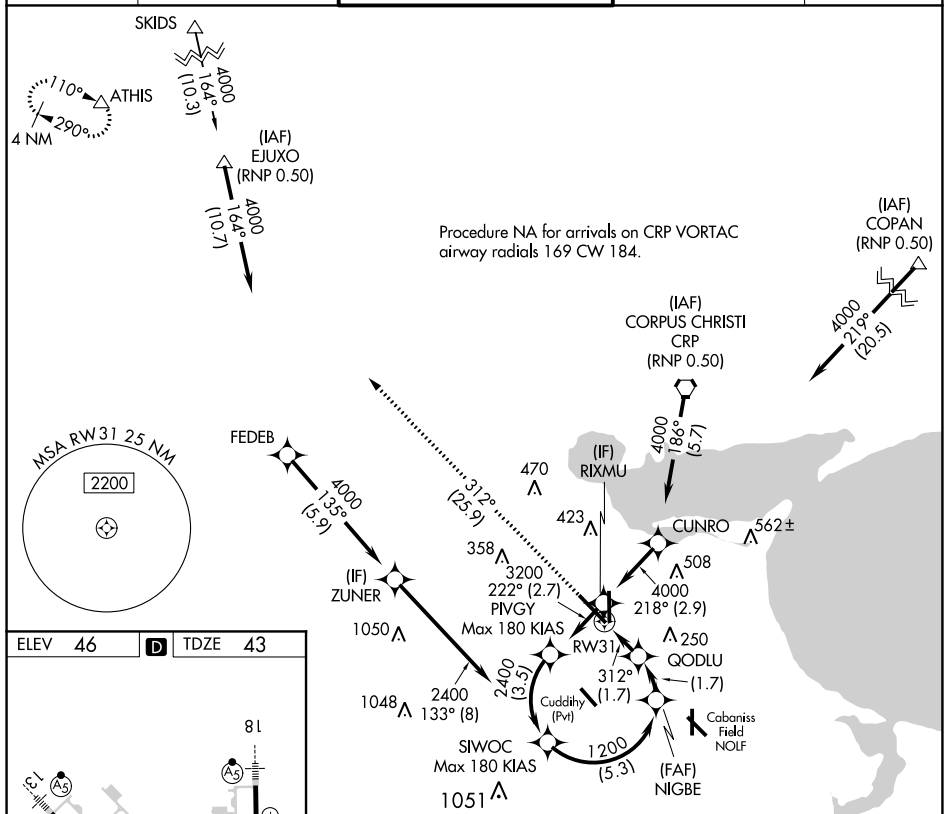

| | | |
|---------|----------|---------|
| ELEV 46 | D | TDZE 43 |
|---------|----------|---------|

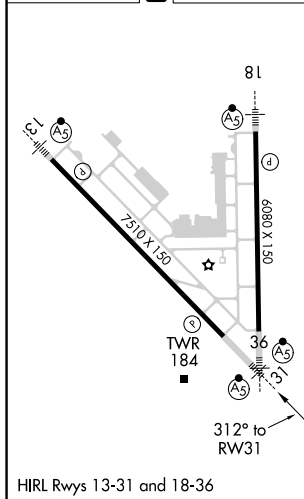

| 2000 tr 312° | ATHIS | See planview for multiple IF locations. | | |
|---------------------|--------------|---|----------------------|--------------------|
| | QODLU 646 | NIGBE 1200 | SIWOC <u>2400</u> | GP 3.00° TCH 50 |
| | | 1.7 NM | 1.7 NM | 5.3 NM |
| CATEGORY | A | B | C | D |
| RNP 0.14 DA* | | 303-½ | 260 (300-½) | |
| RNP 0.30 DA | | 384-⅝ | 341 (400-⅝) | |

AUTHORIZATION REQUIRED