WAAS	APP CRS		
CH **63230**	**173°**	Rwy Idg	**5501**
W17A		TDZE	**592**
		Apt Elev	**592**

RNAV (GPS) RWY 17
MC GREGOR EXECUTIVE (PWG)

Circling to Rwy 4 NA at night. Baro-VNAV NA when using Waco Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Waco Rgnl altimeter setting and increase all DA 31 feet and MDA 40 feet, and increase LPV all Cats visibility and LNAV/VNAV all Cats visibility ⅛ mile.

ASR

MISSED APPROACH: Climb to 2500 direct ZUDIS and on track 095° to SATTY and hold.

AWOS-3PT	WACO APP CON ★	GCO	UNICOM
135.525	**127.65 352.0**	**121.725**	**122.8** (CTAF) L

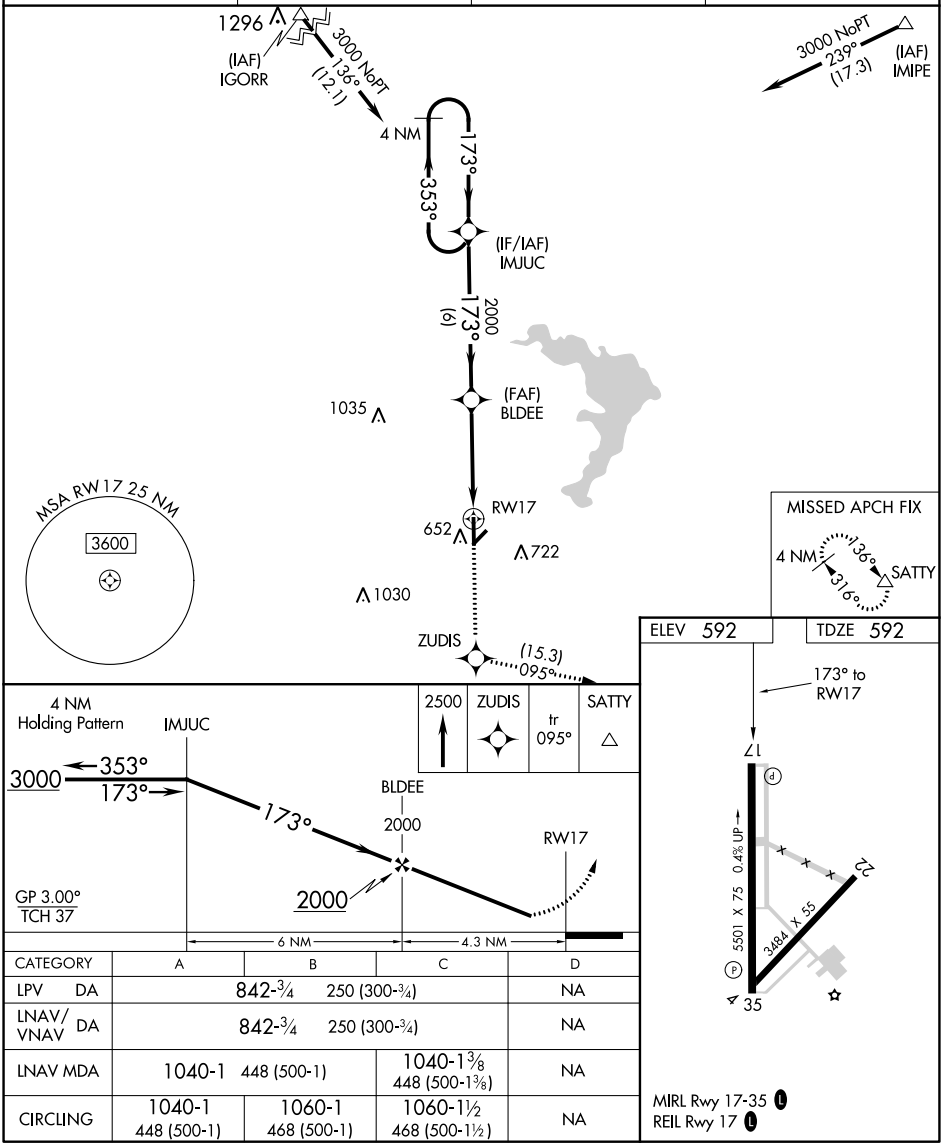

CATEGORY	A	B	C	D
LPV DA	842-¾ 250 (300-¾)			NA
LNAV/VNAV DA	842-¾ 250 (300-¾)			NA
LNAV MDA	1040-1 448 (500-1)		1040-1⅜ 448 (500-1⅜)	NA
CIRCLING	1040-1 448 (500-1)	1060-1 468 (500-1)	1060-1½ 468 (500-1½)	NA

MIRL Rwy 17-35 L
REIL Rwy 17 L

SC-3, 03 DEC 2020 to 31 DEC 2020
SC-3, 03 DEC 2020 to 31 DEC 2020