

WAAS CH 61003 W19A	APP CRS 191°	Rwy Idg TDZE 293 Apt Elev 298	9013
--	------------------------	---	-------------


RNAV (GPS) RWY 19
KEY FIELD (MEI)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C (18°F) or above 54°C (130°F). Circling NA southeast of Rwy 1 and 22. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hattiesburg-Laurel Rgnl altimeter setting and increase all DA 138 feet and all MDA 140 feet, increase LPV all Cats visibility to 1¼ mile, LNAV/VNAV all Cats visibility to 1½ mile, LNAV Cats C, D, and E visibility to 1¾ mile, and Circling Cat C visibility ½ mile and Cat D visibility ¼ mile. For inop MALSR increase LPV Cat E to RVR 5500, LNAV/VNAV Cat E visibility to 1½ mile, and LNAV Cat E visibility to 1¾ mile. For inop MALSR when using Hattiesburg-Laurel Rgnl altimeter setting, increase LPV Cat E visibility to 1¾ mile, LNAV/VNAV Cat E visibility to 1¾ mile and LNAV Cat E visibility to 1¾ mile. Helicopter visibility reduction below RVR 4000 NA. Baro-VNAV and VDP NA when using Hattiesburg-Laurel Rgnl altimeter setting. Night landing: Rwy 22 NA.

MALSR

MISSED APPROACH:
Climb to 900 then
climbing right turn
to 3000 direct
PAULD and hold.

ATIS 126.475 291.675	MERIDIAN APP CON ★ 120.5 269.325	KEY TOWER ★ 133.975 (CTAF) 257.8	GND CON 121.9 348.6	UNICOM 122.95
--------------------------------	--	--	-------------------------------	-------------------------

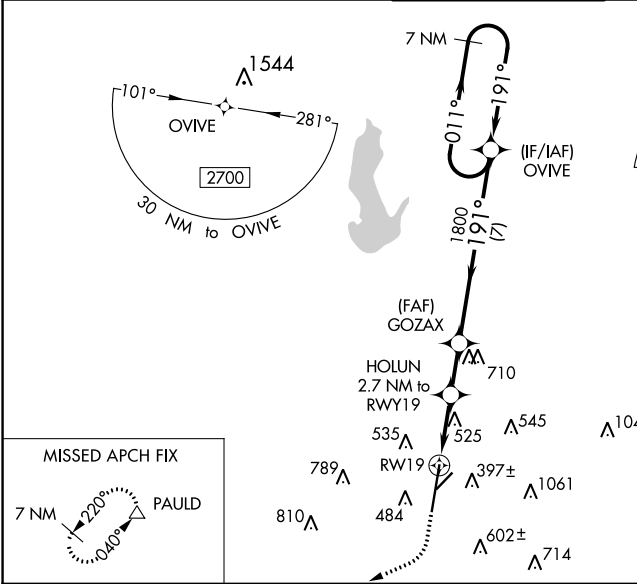

900 3000 PAULD

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69).

HOLUN 2.7 NM to RWY19

GOZAX 1800

OVIVE

7 NM Holding Pattern

*LNAV only.

RWY19

1.4 NM to RWY19


1.3 NM

1.9 NM

7 NM

GP 3.00° TCH 54

CATEGORY	A	B	C	D	E
LPV DA	651/40		358 (400-¾)		
LNAV/VNAV DA	745/53		452 (500-1)		
LNAV MDA	780/40	487 (500-¾)	780/50 487 (500-1)		
CIRCLING	860-1 562 (600-1)	880-1 582 (600-1)	960-1¾ 662 (700-1¾)	1120-2¾ 822 (900-2¾)	1120-3 822 (900-3)

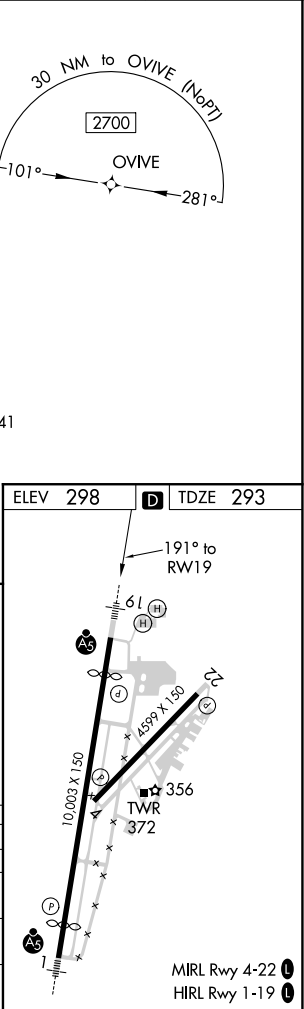

SC-4, 03 DEC 2020 to 31 DEC 2020

SC-4, 03 DEC 2020 to 31 DEC 2020