


LOC I-MLU	APP CRS	Rwy Idg	7505
109.5	042°	TDZE	78
		Apt Elev	79

ILS or LOC RWY 4  
MONROE RGNL (MLU)

ADF or DME required for procedure entry.					MALSR		MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct MLU VORTAC and hold.	
⚠ Circling Rwy 14 NA at night. For inop ALS, increase S-LOC 4 Cat C/D visibility to 1½ SM.								
⚠ UXGOY FIX MINIMUMS: For inop ALS, increase S-LOC 4 Cat C/D visibility to RVR 5500.								
ASR **RVR 1800 authorized with the use of FD or AP or HUD to DA.								
# DME from MLU VORTAC.								
ATIS	MONROE APP CON *	MONROE TOWER *	GND CON	CLNC DEL	UNICOM			
125.05	118.15 290.475	118.9 (CTAF) 0 257.8	121.9	121.65	122.95			

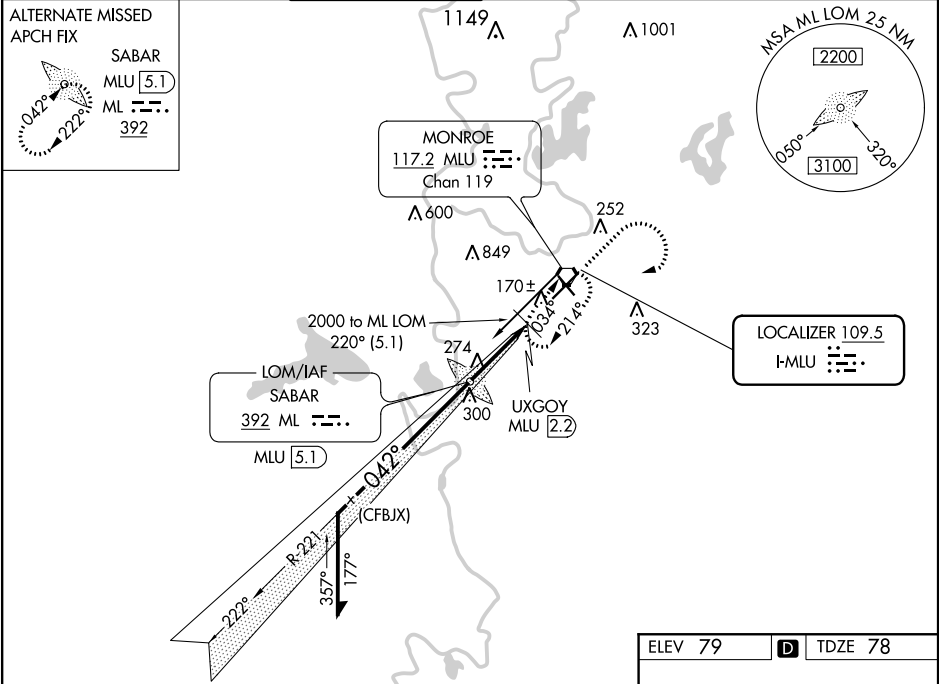

Remain within 10 NM		ML LOM	1800	3000	MLU
		MLU 5.1			
2000		1483	* LOC only.		
042°		UXGOY MLU 2.2			
1500					
GS 3.00°		2.9 NM	1.3 NM		
TCH 50					
CATEGORY	A	B	C	D	
S-ILS 4	**278/24 200 (200-½)				
S-LOC 4	540/24	462 (500-½)	540/50	462 (500-1)	
CIRCLING	580-1	501 (600-1)	740-1¾ 661 (700-1¾)	1160-3 1081 (1100-3)	
# UXGOY FIX MINIMUMS					
S-LOC 4	420/24	342 (400-½)	420/30	342 (400-¾)	
CIRCLING	580-1	501 (600-1)	740-1¾ 661 (700-1¾)	1160-3 1081 (1100-3)	

