


WAAS CH 93712 W36A	APP CRS 002°	Rwy Idg TDZE 346 Apt Elev 346
--	------------------------	---

RNAV (GPS) RWY 36

TUPELO RGNL (TUP)


RNP APCH:


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C (16°F) or above 54°C (130°F). When local altimeter setting not received, use Columbus AFB altimeter setting and increase all DA 112 feet and all MDA 120 feet; increase LNAV/VNAV all Cats visibility ½ mile and LNAV Cats C and D ¾ mile and Circling Cats C and D ½ mile. For inop ALS when using Columbus AFB altimeter setting, increase LPV all Cats visibility ½ SM. Baro-VNAV and VDP NA when using Columbus AFB altimeter setting.

MALSR 

MISSED APPROACH:
Climb to 3000 direct ZUMHA and hold.

ASOS 133.525	MEMPHIS CENTER 128.5 279.55	TUPELO TOWER ★ 118.775 (CTAF) 0 254.275	GND CON 121.825 254.275
------------------------	---------------------------------------	---	-----------------------------------

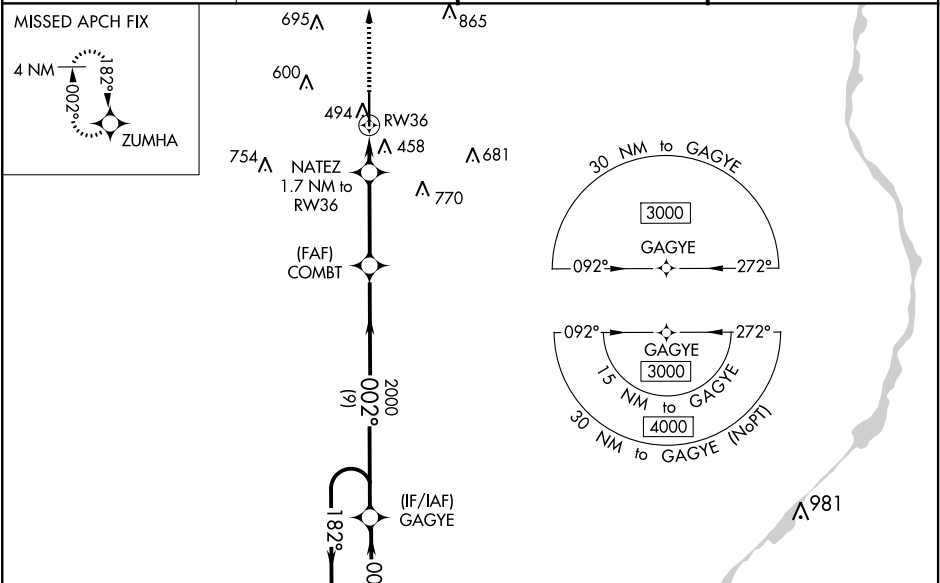




4 NM


ELEV 346

TDZE 346


3000



ZUMHA



*LNAV only.

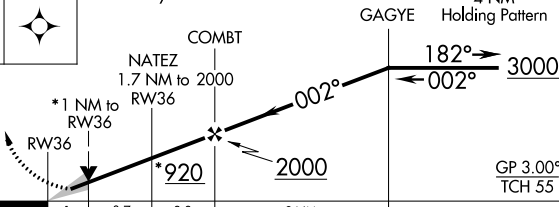

CATEGORY	A	B	C	D
LPV DA	546-½		200 (200-½)	
LNAV/VNAV DA	730-¾		384 (400-¾)	
LNAV MDA	720-½	374 (400-½)	720-⅝	374 (400-⅝)
CIRCLING	820-1	474 (500-1)	900-1½ 554 (600-1½)	1140-2½ 794 (800-2½)

81

7150 X 150

TWR 423

GP 3.00° TCH 55

002° to RW36

