
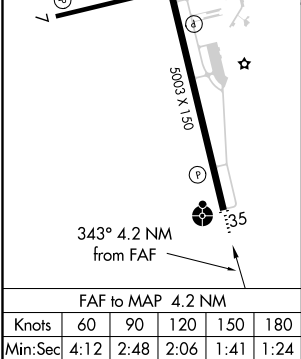


NDB OOC	APP CRS	Rwy Idg	5003
407	343°	TDZE	121
		Apt Elev	121

NDB RWY 35  
NATCHITOCHES RGNL (I/E/R)

 NA	Helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use Alexandria Intl altimeter setting and increase all MDA 100 feet and S-35 Cat C visibility 1/8 mile, Circling Cat C visibility 1/4 mile. For inoperative ODALS increase S-35 Cat C visibility 1/8 mile. Inoperative table does not apply to S-35 Cat A/B.	ODALS 	MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct OOC NDB and hold.
--------	--	-----------	---

AWOS-3 119.025	POLK APP CON 125.4 302.2	GCO 135.075	UNICOM 122.8 (CTAF) 0
-------------------	-----------------------------	----------------	--------------------------

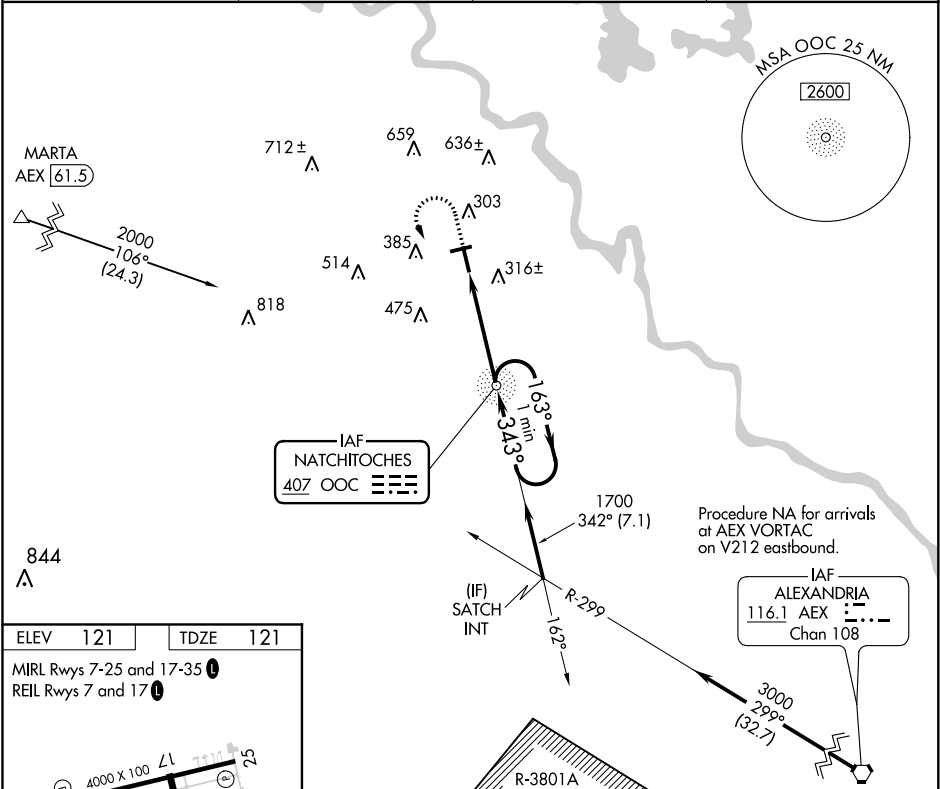

<div><div>1000 ↑</div><div>2000 </div><div>OOC </div></div>			VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 43).			
			NDB			
			One Minute Holding Pattern			
4.2 NM						
CATEGORY	A		B		C	D
S-35	720-1		599 (600-1)		720-1 $\frac{5}{8}$ 599 (600-1 $\frac{5}{8}$ )	NA
CIRCLING	720-1 599 (600-1)		740-1 619 (700-1)		740-1 $\frac{3}{4}$ 619 (700-1 $\frac{3}{4}$ )	NA

SC-4, 03 DEC 2020 to 31 DEC 2020

SC-4, 03 DEC 2020 to 31 DEC 2020