RNAV (GPS) RWY 35

PORT OF SOUTH LOUISIANA EXECUTIVE RGNL (APS)

WAAS	APP CRS	Rwy Idg	5151
CH 87111	353°	TDZE	7
W35A		Apt Elev	7

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Rwy 35 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Louis Armstrong New Orleans Intl altimeter setting and increase LPV DA to 318 feet, LNAV/VNAV DA to 618 feet, all visibilities ⅛ SM; increase all MDA 60 feet and LNAV visibility Cat C ⅛ SM. Baro-VNAV and VDP NA with Louis Armstrong New Orleans Intl altimeter setting.

MISSED APPROACH: Climb to 1800 direct KBOOS and hold.

AWOS-3PT	NEW ORLEANS APP CON	UNICOM
125.45	125.5 350.35	122.7 (CTAF) L

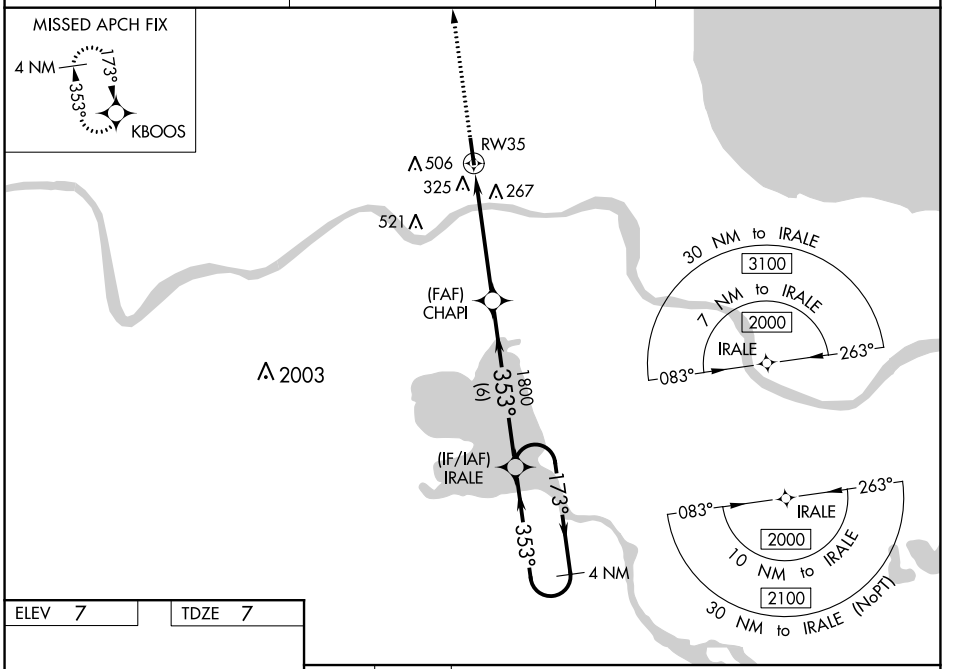

ELEV 7 TDZ 7

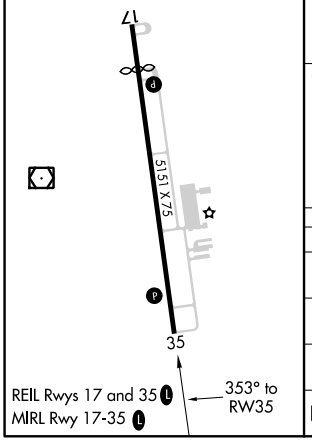

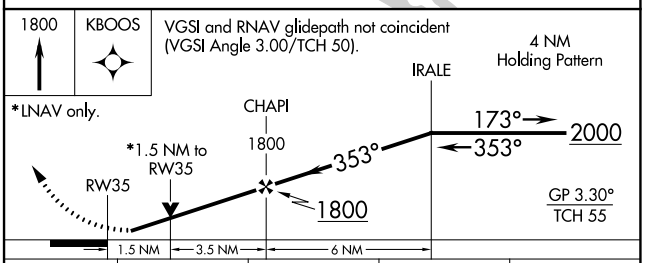

CATEGORY		A	B	C	D
LPV	DA	276-⅞ 269 (300-⅞)			NA
LNAV/VNAV	DA	576-1¾ 569 (600-1¾)			NA
LNAV	MDA	580-1 573 (600-1)		580-1⅝ 573 (600-1⅝)	NA
C CIRCLING		700-1 693 (700-1)		820-2½ 813 (900-2½)	NA

SC-4, 03 DEC 2020 to 31 DEC 2020
SC-4, 03 DEC 2020 to 31 DEC 2020