RNAV (GPS) RWY 36

RUSTON RGNL (RSN)

WAAS CH 86722 W36A	APP CRS 357°	Rwy Idg 5000 TDZE 311 Apt Elev 311

RNP APCH.

Baro-VNAV NA when using Monroe altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 41°C (105°F). Rwy 36 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Monroe altimeter setting and increase all DA 97 feet and all MDA 100 feet; increase LPV all Cats and LNAV/VNAV all Cats visibility ⅜ mile and LNAV Cat C and D and Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 2000 direct CIKOL and hold.

AWOS-3PT	MONROE APP CON ★	CLNC DEL	UNICOM
119.525	126.9 307.9	118.8	122.7 (CTAF) L

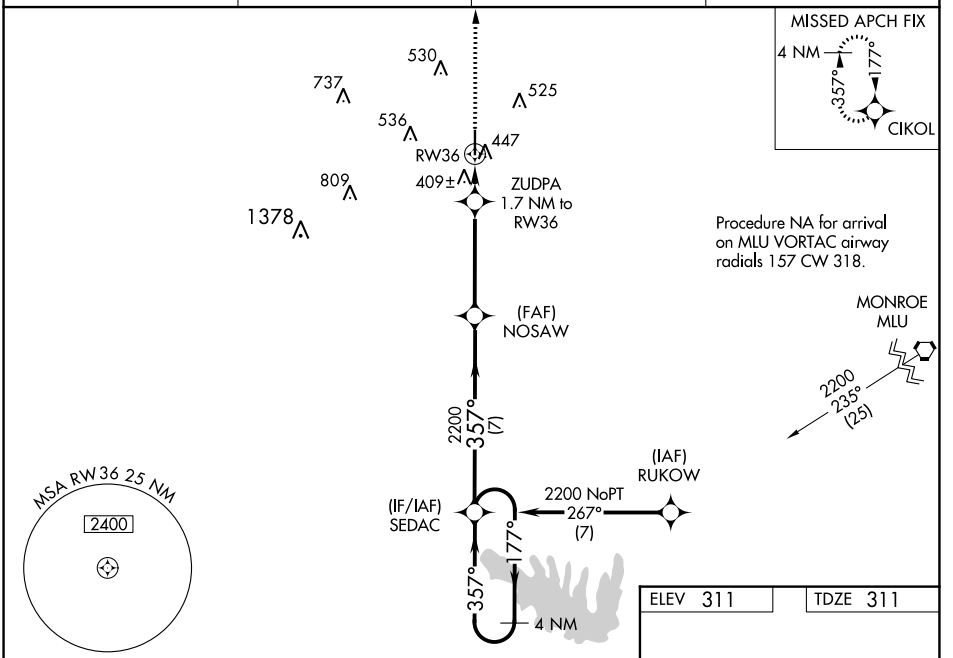

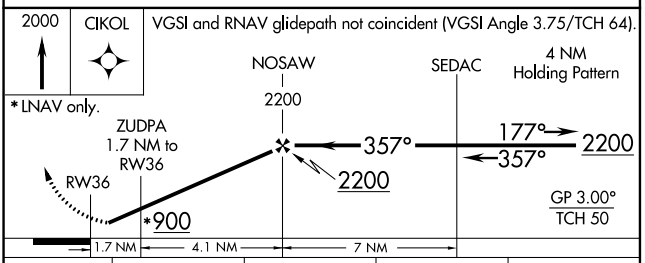

CATEGORY	A	B	C	D
LPV DA	625-1	314 (400-1)		
LNAV/VNAV DA	706-1¼	395 (400-1¼)		
LNAV MDA	700-1	389 (400-1)	700-1⅛	389 (400-1⅛)
CIRCLING	760-1 449 (500-1)	780-1 469 (500-1)	780-1½ 469 (500-1½)	880-2 569 (600-2)

ELEV 311 TDZE 311

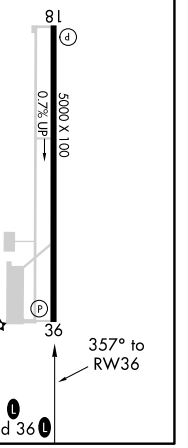

SC-4, 03 DEC 2020 to 31 DEC 2020
SC-4, 03 DEC 2020 to 31 DEC 2020