D-ATIS
124.6
CLNC DEL
125.45
CPDLC
GND CON
121.9
HOBBY TOWER
118.7 256.9
HOUSTON DEP CON
132.25 285.425

TOP ALTITUDE: 16000

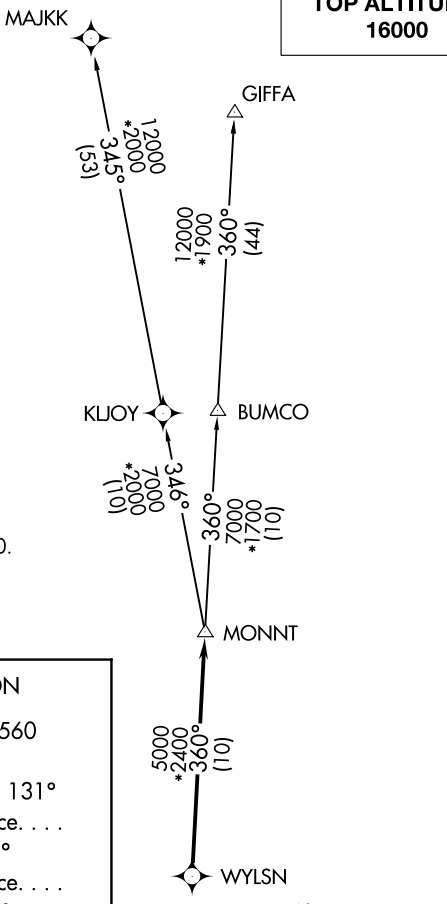

NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.

TAKEOFF MINIMUMS
Rwys 4, 13L/R, 17, 31L/R, 35: Standard with minimum climb of 500′ per NM to 560.
Rwy 22: Standard with minimum climb of 500′ per NM to 700.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 4: Climb heading 041° to 560 for RADAR vectors to WYLSN, thence. . . .
TAKEOFF RWYS 13L/R: Climb on heading 131° to 560 for RADAR vectors to WYLSN, thence. . . .
TAKEOFF RWY 17: Climb on heading 176° to 560 for RADAR vectors to WYLSN, thence. . . .
TAKEOFF RWY 22: Climb on heading 221° to 700 for RADAR vectors to WYLSN, thence. . . .
TAKEOFF RWYS 31L/R: Climb on heading 311° to 560 for RADAR vectors to WYLSN, thence. . . .
TAKEOFF RWY 35: Climb on heading 356° to 560 for RADAR vectors to WYLSN, thence. . . .

. . . .on track 360° to MONNT, then on (transition). Maintain 16000 or as assigned by ATC. Expect filed altitude 10 minutes after departure.

GIFFA TRANSITION (WYLSN7.GIFFA)
MAJKK TRANSITION (WYLSN7.MAJKK)

NOTE: Chart not to scale.

SC-5, 03 DEC 2020 to 31 DEC 2020
SC-5, 03 DEC 2020 to 31 DEC 2020