ILS or LOC RWY 36

NACOGDOCHES A L MANGHAM JR RGNL (OCH)

LOC/DME I-OCH	APP CRS	Rwy Idg	5000
111.5	359°	TDZE	343
Chan 52		Apt Elev	355

T A NA — ADF required. When local altimeter setting not received, use Lufkin altimeter setting and increase all DA 56 feet and all MDA 60 feet and increase all S-LOC 36 Cat C visibilities ¼ SM. VDP NA when using Lufkin altimeter setting. Localizer unusable inside 0.3 NM from threshold. Autopilot coupled approach NA below 740.

MALSR (A5)

MISSED APPROACH: Climb to 1000 then climbing left turn to 2100 direct NADOS/OC NDB and hold.

AWOS-3PT	HOUSTON CENTER	UNICOM
135.625	125.175 285.575	123.0 (CTAF) L

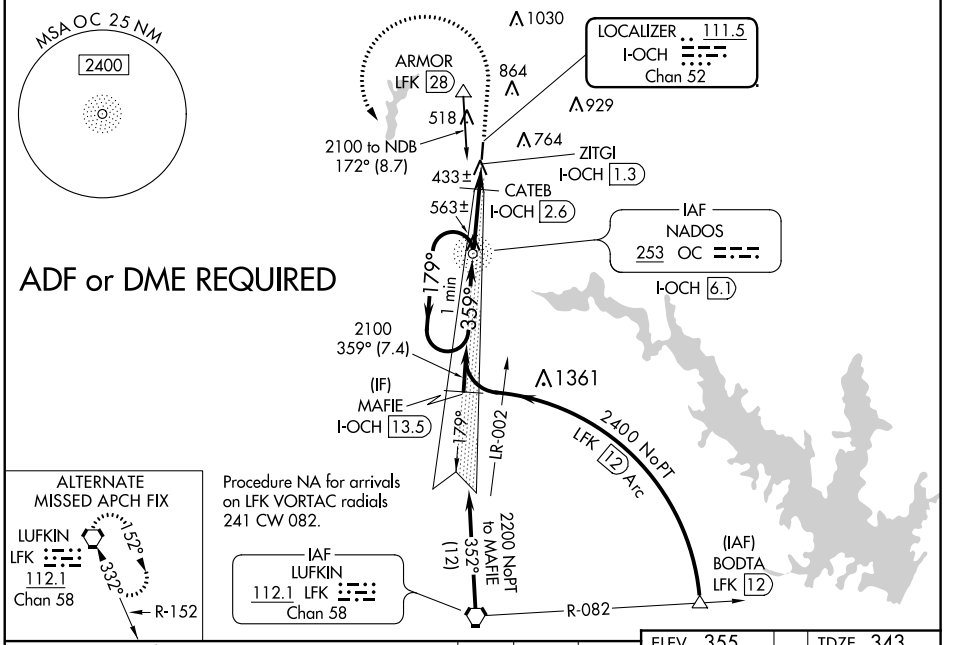

* 820 when using Lufkin altimeter setting.

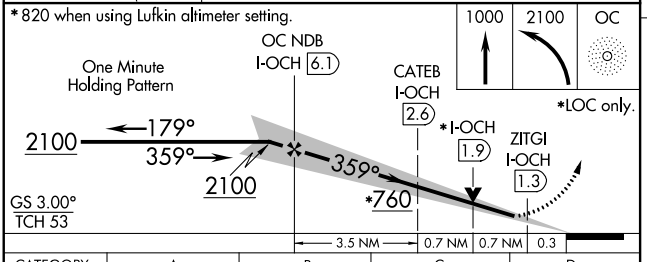

CATEGORY	A	B	C	D
S-ILS 36	543-½ 200 (200-½)			NA
S-LOC 36	760-½ 417 (500-½)		760-¾ 417 (500-¾)	NA
CIRCLING	860-1 505 (600-1)		860-1½ 505 (600-1½)	NA
CATEB FIX MINIMUMS (DME REQUIRED)				
S-LOC 36	700-½ 357 (400-½)		700-⅝ 357 (400-⅝)	NA
CIRCLING	860-1 505 (600-1)		860-1½ 505 (600-1½)	NA

ELEV 355 TDZE 343

MIRL Rwy 18-36 L
REIL Rwys 18 L

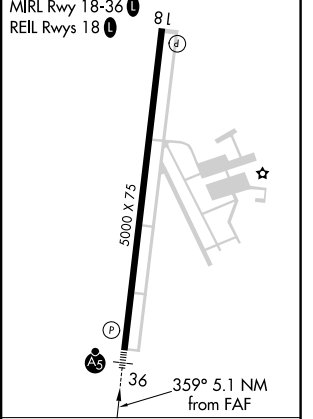

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

SC-5, 03 DEC 2020 to 31 DEC 2020
SC-5, 03 DEC 2020 to 31 DEC 2020