

(BLTWY6.BLTWY) 19115
BLTWY SIX DEPARTURE (RNAV)

AL-6460 (FAA)

PEARLAND RGNL (LVJ)
HOUSTON, TEXAS

ASOS
118.525
CLNC DEL
124.0
CTAF
122.8
HOUSTON DEP CON
134.45 284.0

TOP ALTITUDE:
ASSIGNED BY ATC

NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.

TAKEOFF MINIMUMS

Rwys 14, 32: Standard with minimum climb of
500' per NM to 560.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 14: Climb heading 142° to 1600
for RADAR vectors to DREMR, thence . . .

TAKEOFF RWY 32: Climb heading 322° to 700
for RADAR vectors to DREMR, thence . . .

...on track 345° to LITLD, then on track 346° to
BLTWY, then on (transition). Maintain ATC assigned
altitude. Expect filed altitude 10 minutes after
departure.

CRIED TRANSITION (BLTWY6.CRIED)

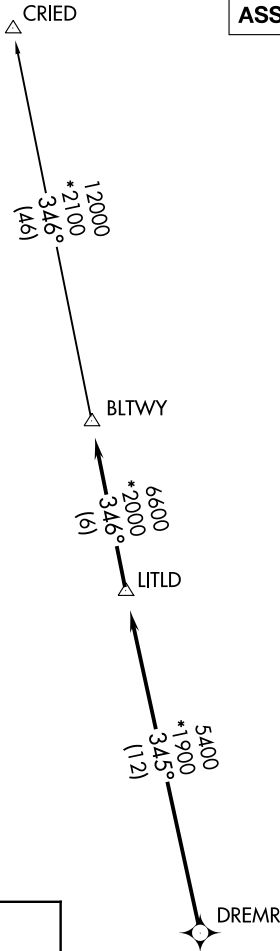

NOTE: Chart not to scale.

BLTWY SIX DEPARTURE (RNAV)
(BLTWY6.BLTWY) 25APR19

HOUSTON, TEXAS
PEARLAND RGNL (LVJ)

SC-5, 03 DEC 2020 to 31 DEC 2020

SC-5, 03 DEC 2020 to 31 DEC 2020