


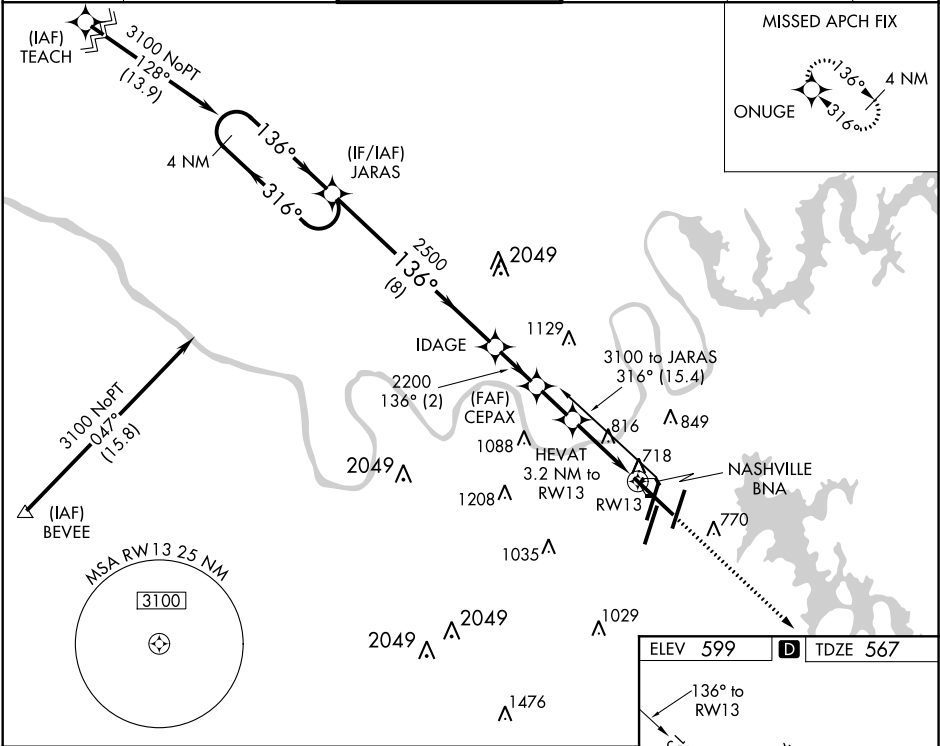
|             |          |             |
|-------------|----------|-------------|
| APP CRS     | Rwy Idg  | <b>9487</b> |
| <b>136°</b> | TDZE     | <b>567</b>  |
|             | Apt Elev | <b>599</b>  |

# RNAV (GPS) RWY 13

NASHVILLE INTL (BNA)

|   |  |  |  |
|---|--|--|--|
| RNP APCH.   |  | MISSED APPROACH: Climb to 3000 direct ONUGE and hold.                        |  |
|  |  | For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. |  |

|                        |   |                                       |                               |                           |       |
|------------------------|---|---------------------------------------|-------------------------------|---------------------------|-------|
| D-ATIS<br><b>135.1</b> | NASHVILLE APP CON<br><b>118.4 360.7</b> | NASHVILLE TOWER<br><b>118.6 257.8</b> | GND CON<br><b>121.9 348.6</b> | CLNC DEL<br><b>126.05</b> | CPDLC |
|------------------------|---|---------------------------------------|-------------------------------|---------------------------|-------|



|                           |             |             |              |              |        |       |
|---------------------------|-------------|-------------|--------------|--------------|--------|-------|
| 4 NM Holding Pattern      |             | JARAS       | IDAGE        | CEPAX        | HEVAT  | ONUGE |
| 3100 ← 316° → 136° → 2500 |             |             |              |              |        |       |
| GP 3.00° TCH 55           |             |             |              |              |        |       |
|                           |             | 8 NM        | 2 NM         | 1.8 NM       | 1.9 NM | 1.3   |
| CATEGORY                  | A           | B           | C            | D            |        |       |
| LNAV/VNAV DA              | 968-1½      |             | 401 (400-1½) |              |        |       |
| LNAV MDA                  | 1080-1      | 513 (500-1) | 1080-1½      | 1080-1¾      |        |       |
|                           |             |             | 513 (500-1½) | 513 (500-1¾) |        |       |
| CIRCLING                  | 1100-1      | 1120-1      | 1200-1¾      | 1380-2½      |        |       |
|                           | 501 (600-1) | 521 (600-1) | 601 (700-1¾) | 781 (800-2½) |        |       |

