

WAAS CH <b>78411</b> <b>W20A</b>	APP CRS <b>201°</b>	Rwy Idg TDZE <b>578</b> Apt Elev <b>599</b>
--	------------------------	---

RNAV (GPS) Y RWY 20R

NASHVILLE INTL (BNA)



**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). Use of FD or AP providing RNAV track guidance required during simultaneous operations. Simultaneous approach authorized with Rwy 20L. LNAV procedure NA during simultaneous operations. DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV Cat D visibility to 1½ SM and LNAV Cats C and D visibility to 1¼ SM.

MALSF

MISSED APPROACH:

Climb to 3000 direct RONLE and hold.

D-ATIS <b>135.1</b>	NASHVILLE APP CON <b>118.4 360.7</b>	NASHVILLE TOWER <b>118.6 257.8</b>	GND CON <b>121.9 348.6</b>	CLNC DEL <b>126.05</b>	CPDLC
------------------------	---	---------------------------------------	-------------------------------	---------------------------	-------

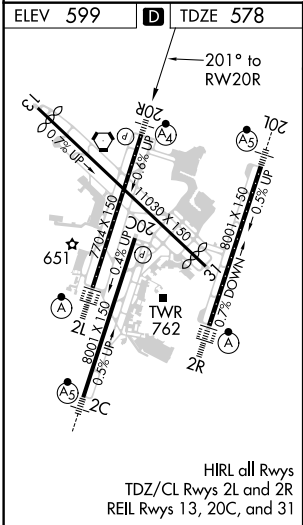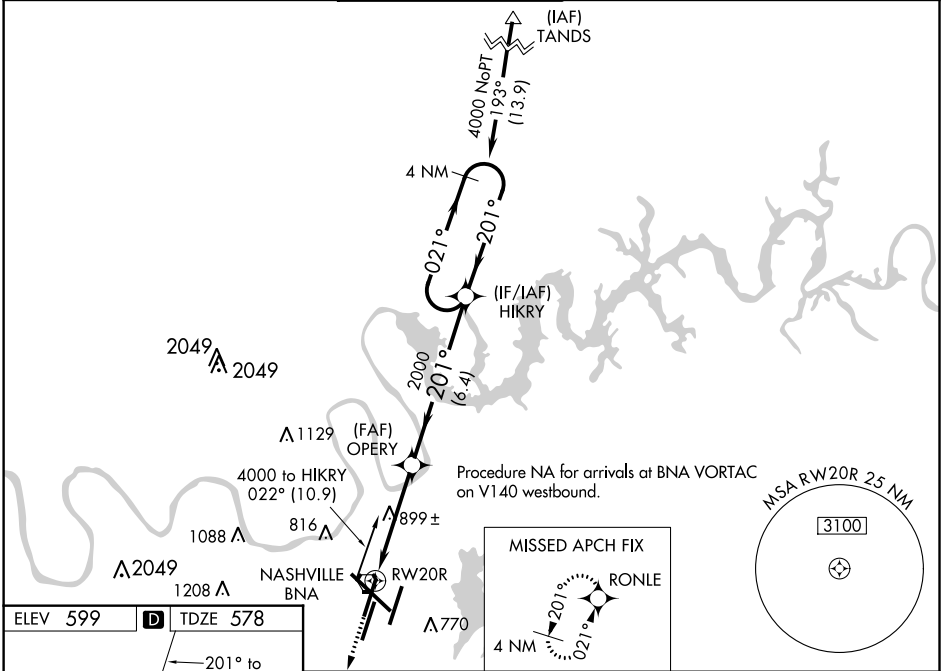

3000 ↑ RONLE		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 79).			
*LNAV only.		HIKRY Holding Pattern			
*1.6 NM to RW20R		021° → 4000 ← 201°			
RW20R		GP 3.00° TCH 60			
1.6 NM		2.8 NM		6.4 NM	
CATEGORY	A		B	C	D
LPV DA	778/40 200 (200-¾)				
LNAV/ VNAV DA	1038-1⅓ 460 (500-1⅓)				
LNAV MDA	1160/40 582 (600-¾)		1160-1⅓ 582 (600-1⅓)		
<b>C</b> CIRCLING	1160-1 561 (600-1)		1200-1¾ 601 (700-1¾)		1380-2½ 781 (800-2½)