

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 49137 W10A | APP CRS 096° | Rwy Idg TDZE Apt Elev | 3463 1013 1048 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 10

GREENVILLE DOWNTOWN (GMU)


▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Greer altimeter setting and increase all DA 29 feet and all MDA 40 feet; increase LNAV/VNAV all Cats visibility 1⁄8 mile and Circling Cat C visibility 1⁄4 mile.

MISSED APPROACH: Climb to 3700 direct JADOT and hold.

| | | | | |
|--------------------------|---|--|--------------------------|-------------------------|
| ATIS ★ 127.075 | GREER APP CON ★ 118.8 270.275 | GREENVILLE TOWER ★ 119.9 (CTAF) 0 257.7 | GND CON 121.25 | UNICOM 122.95 |
|--------------------------|---|--|--------------------------|-------------------------|

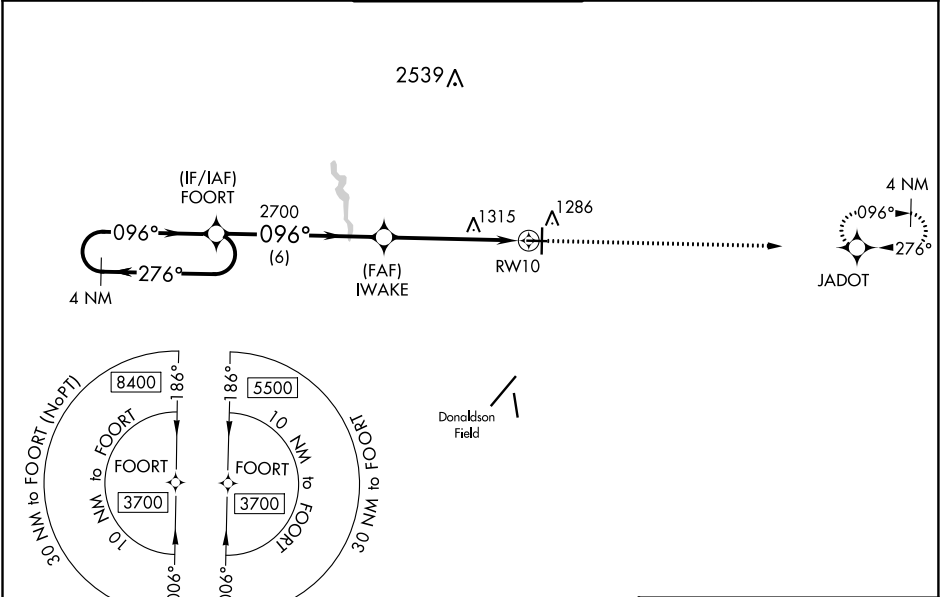

| | | | | | |
|----------------------|--------------------|--------|----------------------|---|--|
| 4 NM Holding Pattern | | FOORT | | 3700 JADOT | |
| GP 3.00° TCH 60 | | IWAKE | | RWY 10 | |
| 6 NM | | 5.2 NM | | 096° to RWY 10 | |
| CATEGORY | A | B | C | D | |
| LPV DA | 1269-1 | | 256 (300-1) | | |
| LNAV/VNAV DA | 1351-1½ | | 338 (400-1½) | | |
| LNAV MDA | 1580-1 567 (600-1) | | 1580-1½ 567 (600-1½) | | |
| CIRCLING | 1620-1 572 (600-1) | | 1780-2 732 (800-2) | | |
| | | | | REIL Rwy 28 REIL Rwy 19 MIRL Rwy 10-28 HIRL Rwy 1-19 | |