WAAS	APP CRS	Rwy Idg	6000
CH 90503	190°	TDZE	20
W19A		Apt Elev	20

RNAV (GPS) RWY 19

NORTHEASTERN RGNL (EDE)

Baro-VNAV NA when using Elizabeth City altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). When local altimeter setting not received, use Elizabeth City altimeter setting and increase LPV DA to 275 LNAV/VNAV DA to 325 and all MDA 60 feet, increase LPV all Cats and LNAV Cat C/D visibility ⅛ mile and LNAV/VNAV visibility all Cats ¼ mile. DME/DME RNP-0.3 NA. VDP NA when using Elizabeth City altimeter setting.

MISSED APPROACH: Climb to 600 then right turn to 2500 direct IDWAP and hold.

AWOS-3	WASHINGTON CENTER	UNICOM
118.275	123.85 279.65	123.0 (CTAF) L

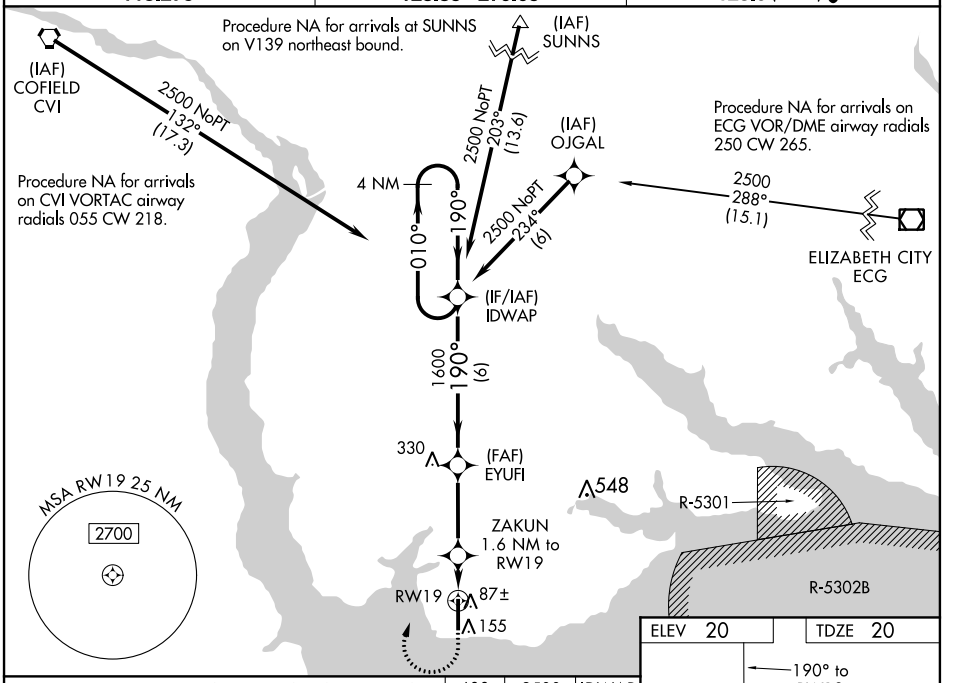

CATEGORY	A	B	C	D
LPV DA	220-¾ 200 (200-¾)			
LNAV/VNAV DA	270-¾ 250 (300-¾)			
LNAV MDA	340-1 320 (400-1)			
CIRCLING	520-1 500 (500-1)		520-1½ 500 (500-1½)	580-2 560 (600-2)

MIRL Rwy 1-19 L
REIL Rwys 1 and 19 L

SE-2, 03 DEC 2020 to 31 DEC 2020
SE-2, 03 DEC 2020 to 31 DEC 2020