

WAAS CH 93641 W17A	APP CRS 167°	Rwy ldg TDZE Apt Elev	6601 2164 2164
----------------------------------------	------------------------	-----------------------------	-------------------------------------------

RNAV (GPS) RWY 17

ASHEVILLE RGNL (AVL)

RNP APCH

▼

▲

Circling NA west of Rwy 17-35. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 2 1/2 SM and increase LNAV Cats C/D visibility to 2 SM.



MALSR

AS


AS

MISSED APPROACH: Climb to 6200 direct AVEBE and hold, continue climb-in-hold to 6200.

ATIS 120.2	ASHEVILLE APP CON* 124.65 269.575	ASHEVILLE TOWER* 121.1(CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
----------------------	---------------------------------------------	------------------------------------------------	-------------------------	-------------------------

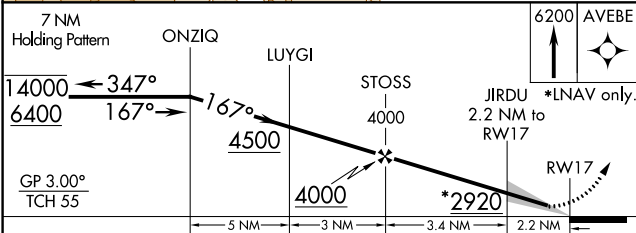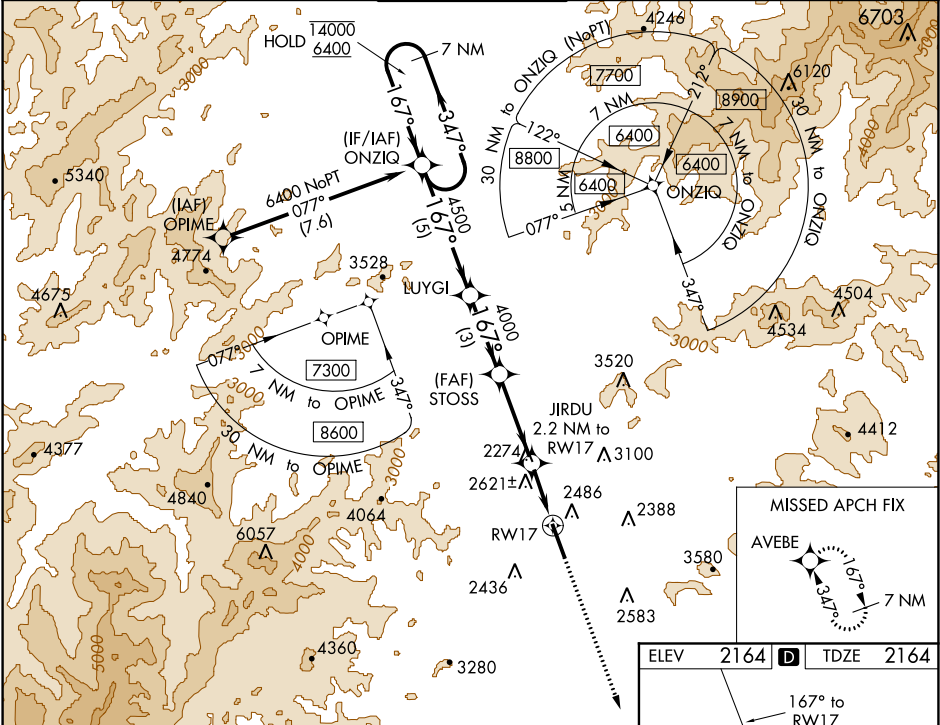

CATEGORY	A	B	C	D
LPV DA		2364-1/2	200 (200-1/2)	
LNAV/VNAV DA		2960-13/4	796 (800-13/4)	
LNAV MDA	2880-1/2	716 (800-1/2)	2880-15/8	716 (800-15/8)
CIRCLING	2880-1	716 (800-1)	3460-3 1296 (1300-3)	3720-3 1556 (1600-3)

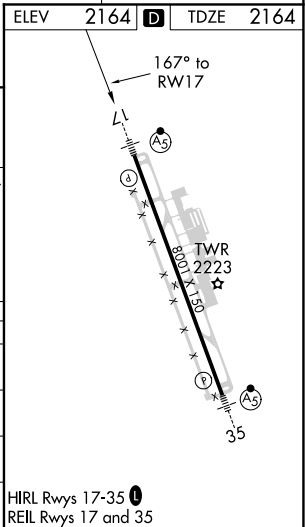

SE-2, 03 DEC 2020 to 31 DEC 2020

SE-2, 03 DEC 2020 to 31 DEC 2020