

WAAS CH 57901 W32A	APP CRS 321°	Rwy Idg 4008 TDZE 41 Apt Elev 41
--	------------------------	---

RNAV (GPS) RWY 32



JACKSONVILLE EXECUTIVE AT CRAIG (CRG)

⚠ Night landing: Rwy 5 NA. Baro-VNAV and VDP NA when using Jacksonville Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C (27°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. VDP NA with Jacksonville Intl altimeter setting. When local altimeter setting not received, use Jacksonville Intl altimeter setting and increase all DA 32 feet and all MDA 40 feet. For inoperative MALSR, when using Jacksonville Intl altimeter setting, increase LNAV/VNAV all Cats visibility to 1½ and LNAV Cats C/D visibility to 1¼.

MALSR

MISSED APPROACH:
Climb to 700 then climbing right turn to 1900 direct JEVAG and hold.

ATIS 125.4	JACKSONVILLE APP CON 124.9 308.4	CRAIG TOWER ★ 132.1 (CTAF) 0 269.525	GND CON 121.8	CLNC DEL 118.35	UNICOM 122.95
----------------------	--	--	-------------------------	---------------------------	-------------------------

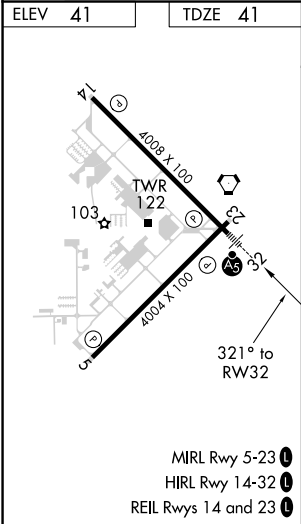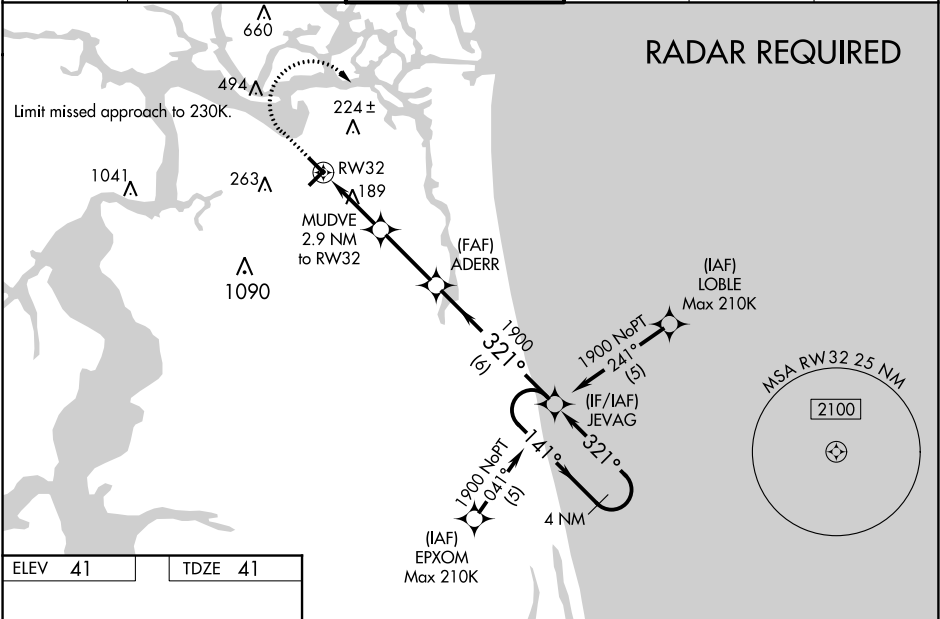

700 1900 JEVAG		ADERR 1900		JEVAG 4 NM Holding Pattern	
*LNAV only.		*1.1 NM to RW32		*1000	
RW32		1.1 NM 1.8 NM 2.8 NM		6 NM	
CATEGORY	A	B	C	D	
LPV DA	241-1 200 (200-1)				
LNAV/VNAV DA	381-1 340 (400-1)				
LNAV MDA	440-1 399 (400-1)				
CIRCLING	500-1 459 (500-1)	580-1 539 (600-1)	580-1½ 539 (600-1½)	600-2 559 (600-2)	

SE-3, 03 DEC 2020 to 31 DEC 2020

SE-3, 03 DEC 2020 to 31 DEC 2020