


SYKES EIGHT DEPARTURE (RNAV)

D-ATIS DEP	128.475
CLNC DEL	133.6
CPDLC	
GND CON	121.7 269.4
TAMPA TOWER	119.5 269.4
TAMPA DEP CON	118.8 239.3

TOP ALTITUDE:
6000

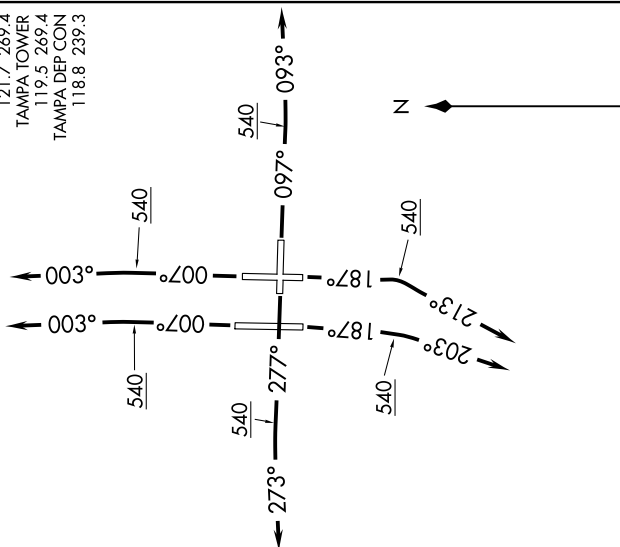


NOTE: RNAV 1.
NOTE: Jets only.
NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: Minimum climb of 275 ft per NM to 9000 is required beginning at SYKES.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 1L/R: Climb on heading 007° to 540, then climb to assigned altitude on heading 003° or as assigned by ATC, thence.
TAKEOFF RWY 10: Climb on heading 097° to 540, then climb to assigned altitude on heading 093° or as assigned by ATC, thence.
TAKEOFF RWY 19L: Climb on heading 187° to 540, then climb to assigned altitude on heading 213° or as assigned by ATC, thence.
TAKEOFF RWY 19R: Climb on heading 187° to 540, then climb to assigned altitude on heading 203° or as assigned by ATC, thence.
TAKEOFF RWY 28: Climb on heading 277° to 540, then climb to assigned altitude on heading 273° or as assigned by ATC, thence.
..... expect RADAR vectors to SYKES, then on track 269° to DORMR. Maintain 6000 or as assigned by ATC, expect clearance to filed altitude within ten (10) minutes after departure.

PSTOL TRANSITION (SYKES8.PSTOL)
SIMMR TRANSITION (SYKES8.SIMMR)

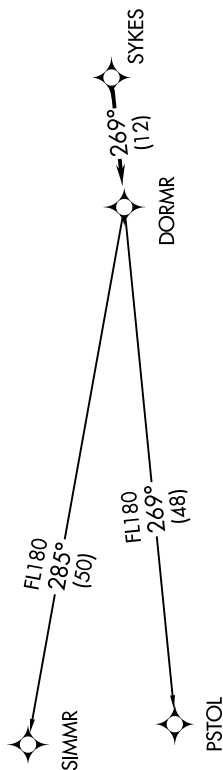

TAKEOFF MINIMUMS:
Rwys 1L/R, 10, 19L/R, 28: Standard with
minimum climb of 500' per NM to 540.

NOTE: Chart not to scale.

SE-3, 03 DEC 2020 to 31 DEC 2020

SYKES EIGHT DEPARTURE (RNAV)

(SYKES8.SYKES) 03JAN19

TAMPA, FLORIDA
TAMPA INTL (TPA)