RNAV (GPS) RWY 9

LAKELAND LINDER INTL (LAL)

WAAS CH 78305 W09A	APP CRS 094°	Rwy Idg 8414 TDZE 132 Apt Elev 142

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using Plant City altimeter setting. When local altimeter setting not received, use Plant City altimeter setting and increase all DA/MDA 20 feet, increase LNAV/VNAV all Cats visibility and LNAV Cats C/D visibility ⅛ SM. For inop ALS, increase LNAV Cats C/D visibility to 1⅛ SM. For inop ALS when using Plant City altimeter setting, increase LNAV/VNAV all Cats visibility to 1 SM. Circling NA to Rwys 8 and 26.

MALSR

MISSED APPROACH: Climb to 1100 then climbing left turn to 2000 direct PLUMY and hold.

ATIS	TAMPA APP CON	LAKELAND TOWER	GND CON
118.025	120.65 290.3	124.5 (CTAF) L 236.775	121.4

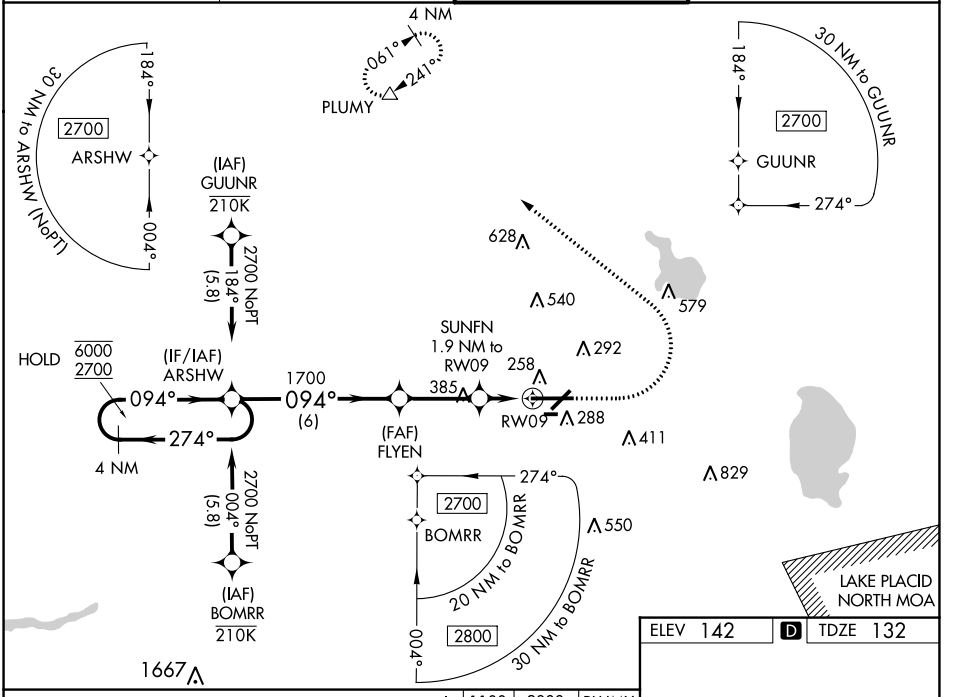

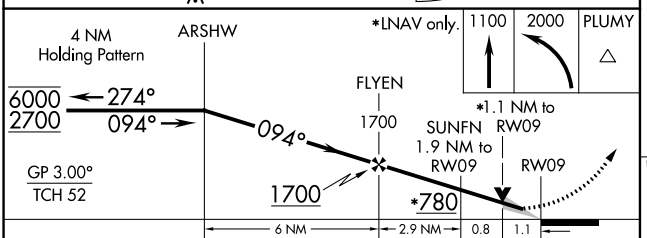

CATEGORY	A	B	C	D
LPV DA	332-½ 200 (200-½)			
LNAV/VNAV DA	439-½ 307 (300-½)			
LNAV MDA	520-½ 388 (400-½)		520-⅝ 388 (400-⅝)	
CIRCLING	600-1 458 (500-1)	660-1 518 (600-1)	660-1½ 518 (600-1½)	700-2 558 (600-2)



HIRL Rwys 5-23 and 9-27 L

SE-3, 03 DEC 2020 to 31 DEC 2020
SE-3, 03 DEC 2020 to 31 DEC 2020