

VORTAC CEW 115.9 Chan 106	APP CRS 106°	Rwy Idg TDZE Apt Elev N/A N/A 214	VOR-A BOB SIKES(CEW)
---	------------------------	---	--------------------------------


⚠

⚠

Circling NA for Cat D west of Rwy 17-35. When local altimeter setting not received, use Eglin AFB altimeter setting and increase all MDA 60 feet and increase Circling Cat C/D visibility ¼ SM.

MISSED APPROACH: Climb to 1200 then climbing left turn to 2200 direct CEW VORTAC and hold.

ASOS 119.275	EGLIN APP CON 124.05 284.65	UNICOM 122.95 (CTAF) ❶
------------------------	---------------------------------------	----------------------------------

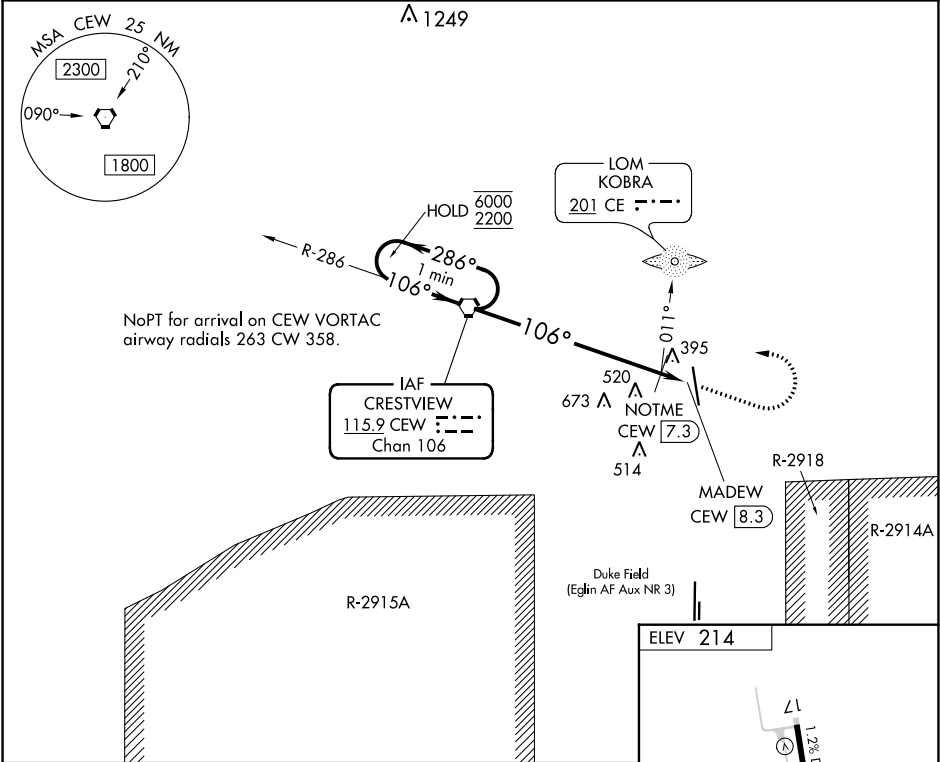

One Minute Holding Pattern		CEW VORTAC	1200	2200	CEW
6000 ← 286°		106° →			
2200					
* 960 when using Eglin AFB altimeter setting.					
		7.3 NM	1 NM		
CATEGORY	A	B	C	D	
❶ CIRCLING	900-1 686 (700-1)		900-2 686 (700-2)	900-2¼ 686 (700-2¼)	
NOTME FIX MINIMUMS (ADF OR DME REQUIRED)					
❶ CIRCLING	700-1 486 (500-1)		820-1¼ 606 (700-1¼)	840-2 626 (700-2)	
HIRL Rwy 17-35 ❶					
FAF to MAP 8.3 NM					
Knots	60	90	120	150	180
Min:Seq	8:18	5:32	4:09	3:19	2:46