


LOC I-PEK	APP CRS	Rwy ldg	10000
110.3	257°	TDZE	27
		Apt Elev	29

ILS or LOC RWY 26  
JACKSONVILLE INTL (JAX)

ADF required. RADAR required for procedure entry.			MALSR	MISSED APPROACH: Climb to 3000 direct DINNS LOM and hold, continue climb-in-hold to 3000.
For inop ALS, increase S-LOC 26 Cats C/D visibility to 1½ SM. ZETRI Fix Minimums: increase S-LOC 26 Cats C/D visibility to RVR 5500.			AS	
D-ATIS	JACKSONVILLE APP CON	JACKSONVILLE TOWER	GND CON	CLNC DEL
125.85	119.0 269.9	118.3 317.7	121.9 348.6	119.5 290.275

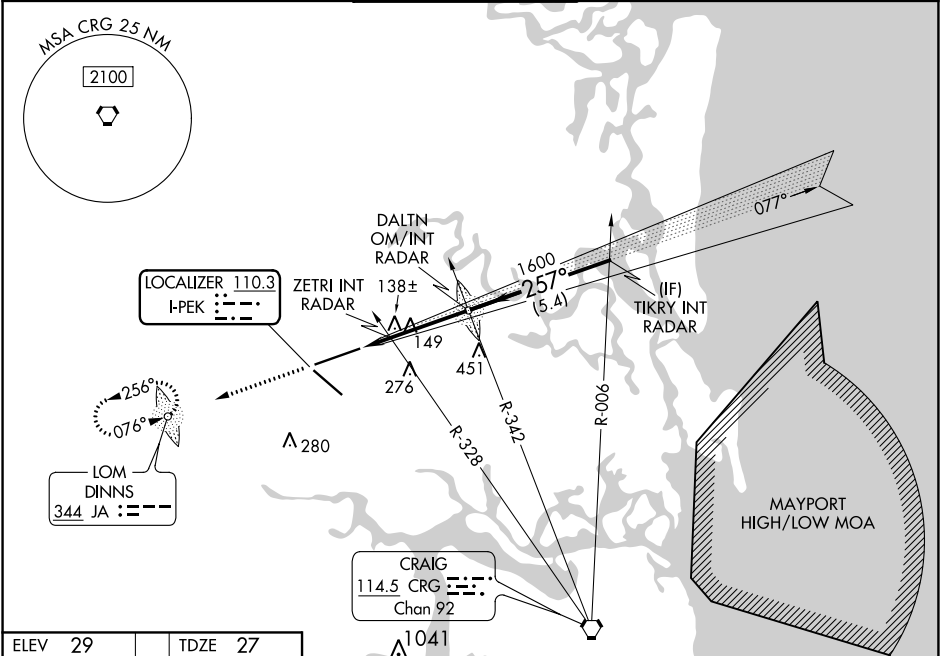

ELEV 29	TDZE 27
257° 4.2 NM from FAF	
REIL Rwy 32	
TDZ/CL Rwys 8, 14, and 26	
HIRL Rwys 8-26 and 14-32	
FAF to MAP 4.2 NM	
Knots	60 90 120 150 180
Min:Sec	4:12 2:48 2:06 1:41 1:24