RNAV (GPS) RWY 5

BARTOW EXECUTIVE (BOW)

WAAS CH 58112 W05A	APP CRS 050°	Rwy Idg 5000 TDZE 123 Apt Elev 125

RNP APCH.

Rwy 5 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Tampa Intl altimeter setting and increase LPV DA to 553 feet, LNAV/VNAV DA to 684 feet and all MDA 120 feet, increase LNAV Cat C visibility ¼ SM, Cat D ⅛ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. VDP and Baro-VNAV NA when using Tampa Intl altimeter setting.

MISSED APPROACH: Climb to 2300 direct ZOMOV and hold.

AWOS-3	TAMPA APP CON	BARTOW TOWER ★	GND CON	UNICOM
123.775	120.65 290.3	121.2 L (CTAF)	121.9	122.95

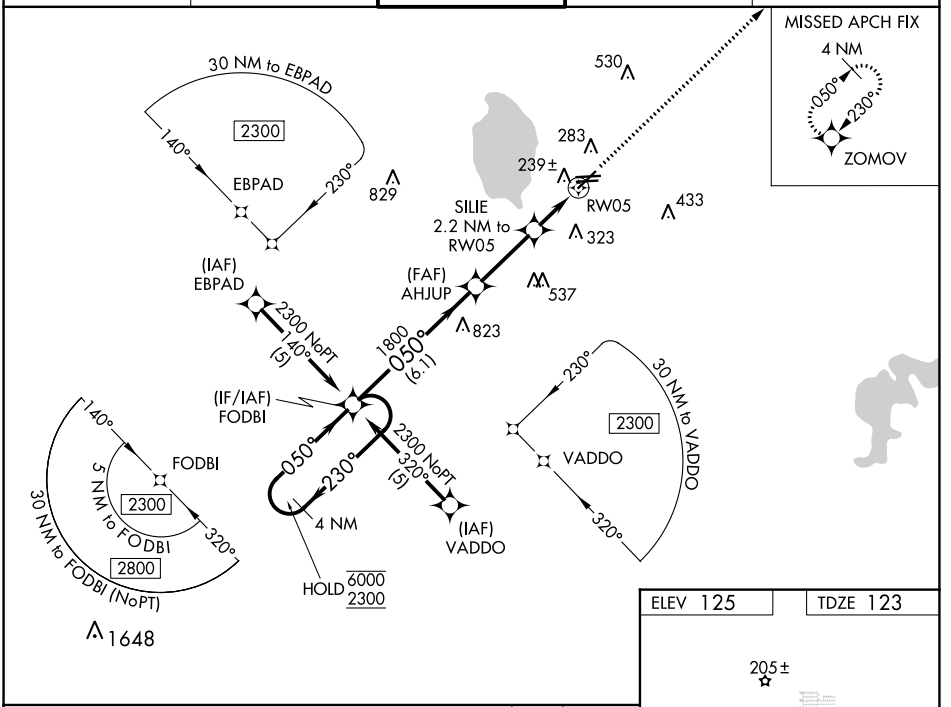

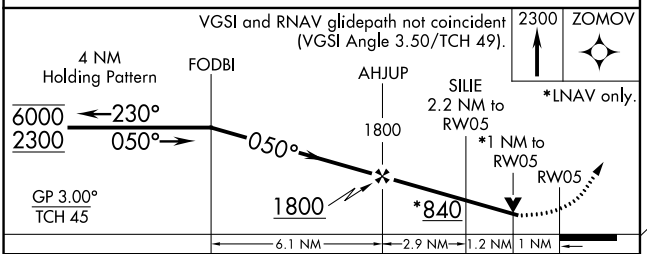

CATEGORY	A	B	C	D
LPV DA	447-1¼ 324 (400-1¼)			
LNAV/VNAV DA	509-1½ 386 (400-1½)			
LNAV MDA	520-1 397 (400-1)		520-1⅛ 397 (400-1⅛)	520-1¼ 397 (400-1¼)

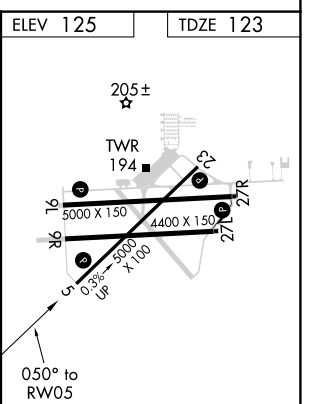

MIRL Rwys 5-23 and 9L-27R L
REIL Rwys 5, 23, 9L and 27R L

SE-3, 03 DEC 2020 to 31 DEC 2020
SE-3, 03 DEC 2020 to 31 DEC 2020