

LOC/DME I-PGD <b>109.75</b> Chan <b>34</b>	APP CRS <b>035°</b>	Rwy Idg <b>7193</b> TDZE <b>24</b> Apt Elev <b>26</b>
--	------------------------	---

ILS or LOC RWY 4  
PUNTA GORDA (PGD)

**T** When local altimeter setting not received, use Page Field altimeter setting and increase DA to 274 feet and all MDAs 60 feet; increase S-LOC 4 Cats C and D visibility  $\frac{1}{8}$  SM, and Circling Cats C and D visibility  $\frac{1}{4}$  SM; ISOXE fix minimums: increase S-LOC 4 Cats C and D visibility  $\frac{1}{8}$  SM, and Circling Cats C and D visibility  $\frac{1}{4}$  SM.

**MISSED APPROACH:** Climb to 500 then climbing right turn to 2000 on heading 040° and PGD VOR R-059 to JOCKS INT and hold.


ASOS <b>135.675</b>	FORT MYERS APP CON ★ <b>127.05 306.2</b>	PUNTA GORDA TOWER ★ <b>121.0 (CTAF) 0</b>	GND CON <b>119.55</b>	CLNC DEL <b>119.55</b>	CLNC DEL <b>127.05</b> (When twr closed)	UNICOM <b>122.975</b>
------------------------	---	--	--------------------------	---------------------------	--	--------------------------




\*520 When using Page Field altimeter setting.



## One Minute Holding Pattern

ZEPIG INT  
I-PGD 11.4

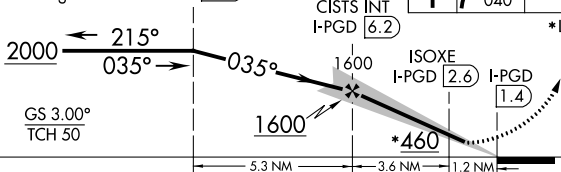

\*LOC only.



CATEGORY	A	B	C	D
S-ILS 4	224- <sup>3</sup> / <sub>4</sub> 200 (200- <sup>3</sup> / <sub>4</sub> )			
S-LOC 4	460-1	436 (500-1)	460-1 <sup>1</sup> / <sub>4</sub>	436 (500-1 <sup>1</sup> / <sub>4</sub> )
 CIRCLING	460-1 434 (500-1)	580-1 554 (600-1)	600-1 <sup>1</sup> / <sub>2</sub> 574 (600-1 <sup>1</sup> / <sub>2</sub> )	740-2 <sup>1</sup> / <sub>4</sub> 714 (800-2 <sup>1</sup> / <sub>4</sub> )
ISOXE FIX MINIMUMS (DME REQUIRED)				
S-LOC 4	380-1 356 (400-1)			
 CIRCLING	460-1 434 (500-1)	580-1 554 (600-1)	600-1 <sup>1</sup> / <sub>2</sub> 574 (600-1 <sup>1</sup> / <sub>2</sub> )	740-2 <sup>1</sup> / <sub>4</sub> 714 (800-2 <sup>1</sup> / <sub>4</sub> )

