
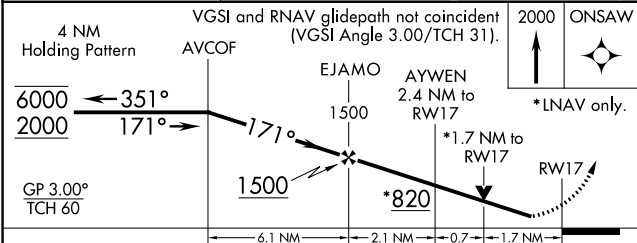


|  |                        |                             |                                     |
|--|------------------------|-----------------------------|-------------------------------------|
| WAAS<br>CH <b>93516</b><br><b>W17A</b> | APP CRS<br><b>171°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5000</b><br><b>5</b><br><b>5</b> |
|--|------------------------|-----------------------------|-------------------------------------|


RNAV (GPS) RWY 17  
MARCO ISLAND EXECUTIVE (MKY)

|           |  |   |
|-----------|--|---|
| PBN APCH. | Baro-VNAV and VDP NA when using Naples altimeter setting.<br>Rwy 17 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C.<br>When local altimeter setting not received, use Naples altimeter setting and increase all DA 26 feet and all MDA 40 feet; increase LNAV/VNAV all Cats visibility ¼ SM. | MISSED APPROACH: Climb to 2000 direct ONSAW and hold. |
|-----------|--|---|

|                            |   |                          |  |
|----------------------------|---|--------------------------|--|
| AWOS-3PT<br><b>120.075</b> | FORT MYERS APP CON ★<br><b>124.125 371.85</b> | CLNC DEL<br><b>120.8</b> | UNICOM<br><b>122.7</b> (CTAF) <b>0</b> |
|----------------------------|---|--------------------------|--|

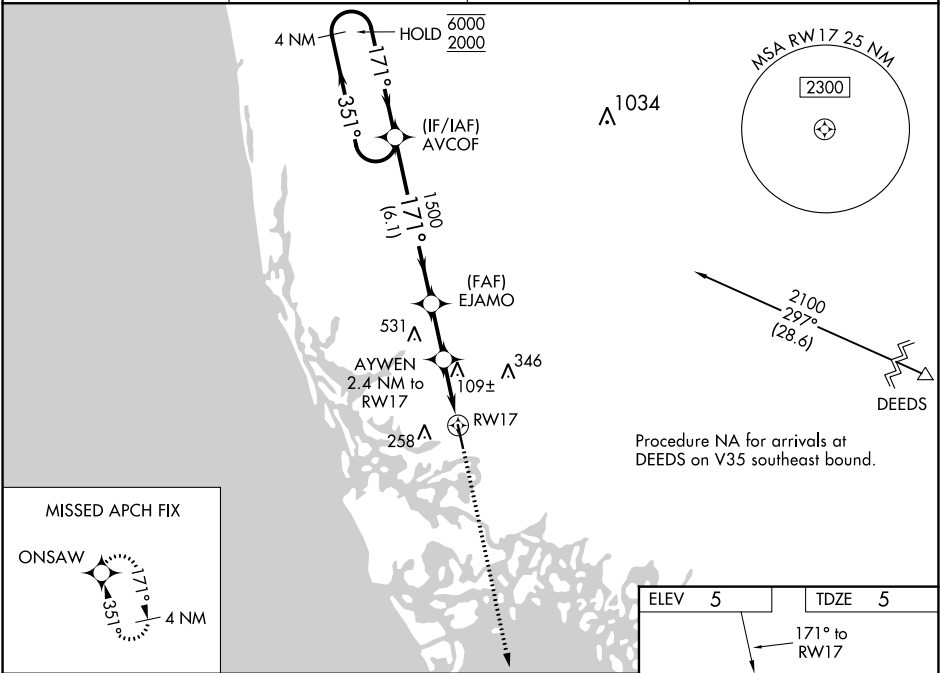

| CATEGORY     | A                   | B                   | C                   | D |
|--------------|---------------------|---------------------|---------------------|---|
| LPV DA       | 300-1 295 (300-1)   |                     |                     |   |
| LNAV/VNAV DA | 458-1½ 453 (500-1½) |                     |                     |   |
| LNAV MDA     | 560-1 555 (600-1)   | 560-1½ 555 (600-1½) | 560-1¾ 555 (600-1¾) |   |
| CIRCLING     | 620-1 615 (700-1)   | 620-1¾ 615 (700-1¾) | 620-2 615 (700-2)   |   |

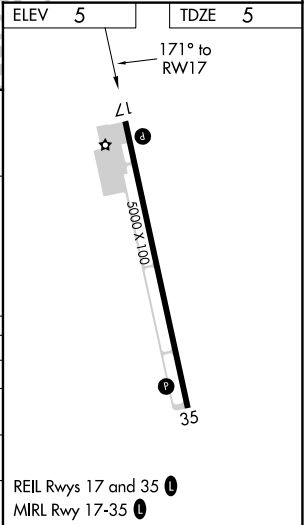

SE-3, 03 DEC 2020 to 31 DEC 2020

SE-3, 03 DEC 2020 to 31 DEC 2020