

WAAS CH <b>78000</b> <b>W05A</b>	APP CRS <b>047°</b>	Rwy Idg <b>6601</b> TDZE <b>196</b> Apt Elev <b>196</b>
--	------------------------	---

**RNAV (GPS) RWY 5**  
SOUTHWEST GEORGIA RGNL (ABY)

RNP APCH.



**T** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. For inop ALS, increase LNAV Cat D visibility to RVR 6000.  
**A** \*\* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR






**MISSED APPROACH:** Climb to 2000  
direct UNIKE and left turn on track  
291° to PZD VOR/DME and hold.

ATIS 133.05	JACKSONVILLE CENTER 125.75 226.8	ALBANY TOWER * 120.25 (CTAF) 0336.4	GND CON 121.9 348.6	UNICOM 122.95
----------------	-------------------------------------	--	------------------------	------------------

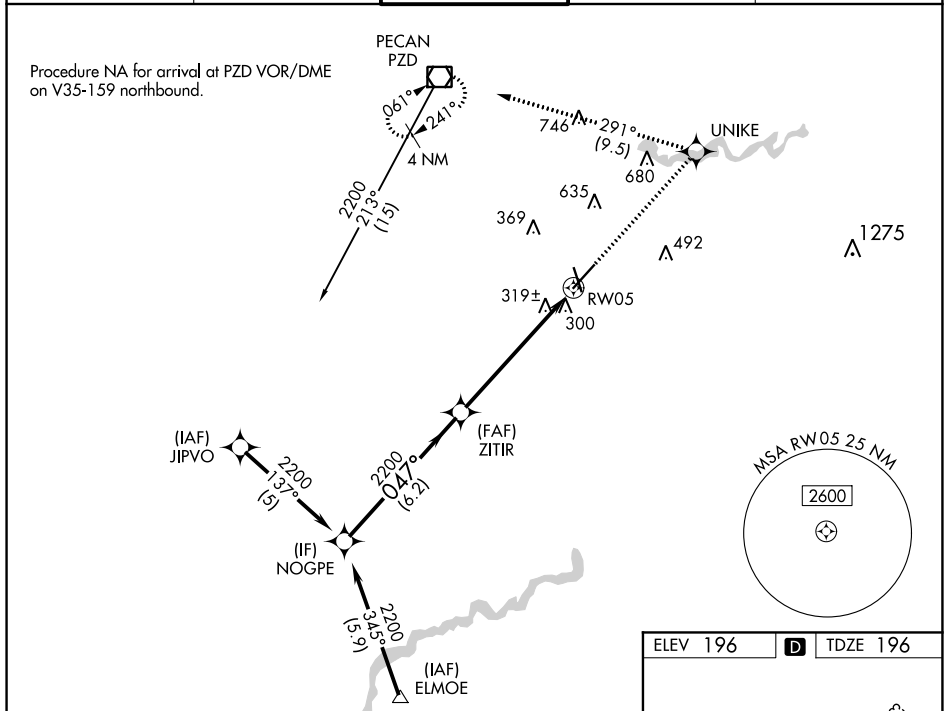

ELEV 196	<b>D</b>	TDZE 196
----------	----------	----------

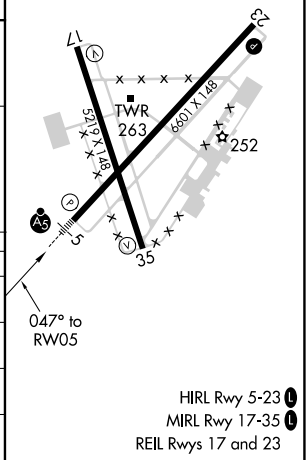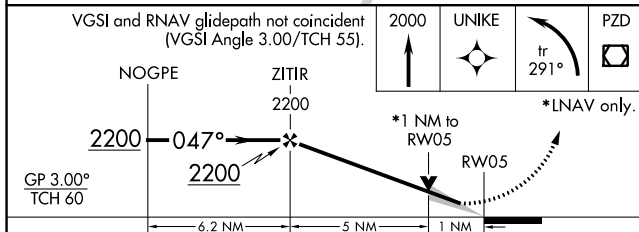

CATEGORY	A	B	C	D
LPV DA**	396/24 200 (200-½)			
LNAV/ VNAV DA	635/50 439 (500-1)			
LNAV MDA	580/24 384 (400-½)			580/50 384 (400-1)
 CIRCLING	640-1 444 (500-1)	660-1 464 (500-1)	940-2¼ 744 (800-2¼)	940-2½ 744 (800-2½)