RNAV (RNP) Z RWY 10

HARTSFIELD-JACKSON ATLANTA INTL (ATL)

APP CRS	Rwy Idg	9000
095°	TDZE	1000
	Apt Elev	1026

For uncompensated Baro-VNAV systems, procedure NA below -8°C (18°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized; arrivel from ROBNS NA. For inop ALS, increase RNP 0.11 DA all Cats visibility to RVR 4500.

ALSF-2

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct SCARR and hold.

D-ATIS	ATLANTA	ATLANTA TOWER						GND CON			ALL
		8L-26R	8R-26L	9L-27R	9R-27L	10-28	ALL RWYS	(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28	ALL RWYS
ARR 119.65	APP CON										
DEP 125.55	127.9 379.9	119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75	121.65	254.4

CLNC DEL 118.1 | CPDLC

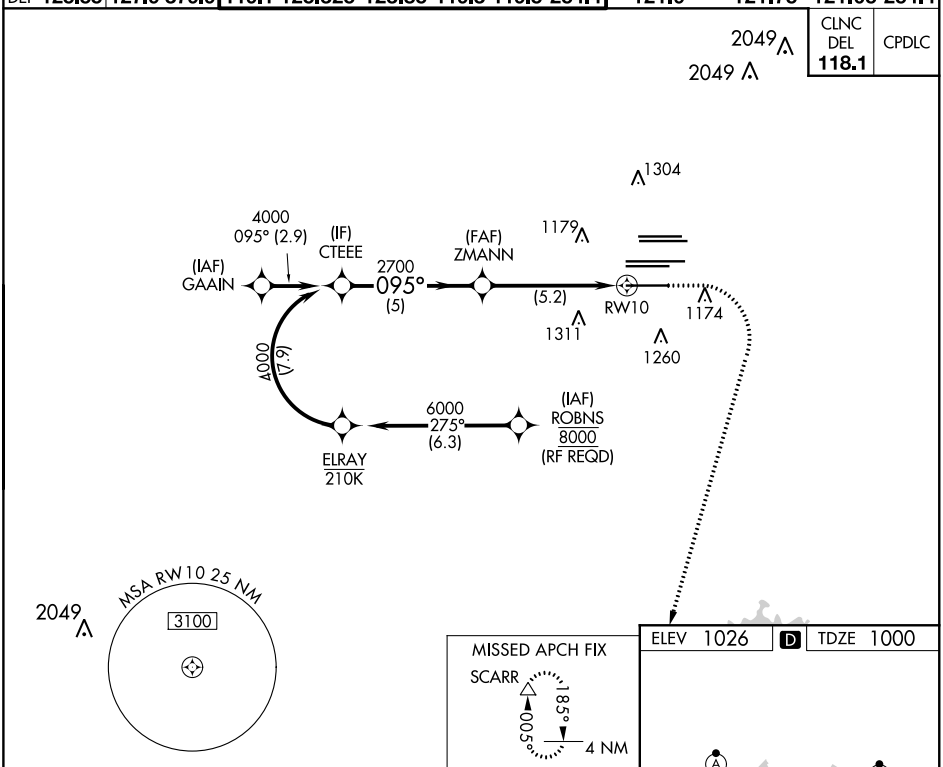

CATEGORY	A	B	C	D
RNP 0.11 DA		1290/24	290 (300-½)	
RNP 0.30 DA		1456/50	456 (500-1)	

AUTHORIZATION REQUIRED

ELEV 1026 | D | TDZE 1000



HIRL all Rwys
TDZ/CL Rwys 8L, 9R, 10, 26R, 27L and 28

SE-4, 03 DEC 2020 to 31 DEC 2020
SE-4, 03 DEC 2020 to 31 DEC 2020