

|  |                        |                             |                                       |
|--|------------------------|-----------------------------|---------------------------------------|
| WAAS<br>CH <b>56501</b><br><b>W07A</b> | APP CRS<br><b>069°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>8001</b><br><b>26</b><br><b>26</b> |
|--|------------------------|-----------------------------|---------------------------------------|

RNAV (GPS) RWY 7

BRUNSWICK GOLDEN ISLES (BQK)


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 48°C (118°F). VDP and Baro-VNAV NA when using St Simons Island altimeter setting. When local altimeter setting not received, use St Simons Island altimeter setting; increase LPV DA to 245 feet, LNAV/VNAV DA to 505 feet and LNAV/VNAV visibility 1 3⁄8 SM; increase all MDAs 20 feet. For inop ALS, increase LNAV Cat C/D visibility to 1 3⁄8 SM. For inop ALS when using St Simons Island altimeter setting, increase LNAV/VNAV all Cats and LNAV Cat C/D visibility to 1 3⁄8 SM.

MALSR

MISSED APPROACH:  
Climb to 3000 feet direct WORG0 and via track 016° to BROWN and hold.

|                          |  |                                 |                                 |
|--------------------------|--|---------------------------------|---------------------------------|
| AWOS-3<br><b>124.175</b> | JACKSONVILLE CENTER<br><b>126.75 277.4</b> | CLNC DEL<br><b>126.75 277.4</b> | UNICOM<br><b>123.0 (CTAF) 0</b> |
|--------------------------|--|---------------------------------|---------------------------------|

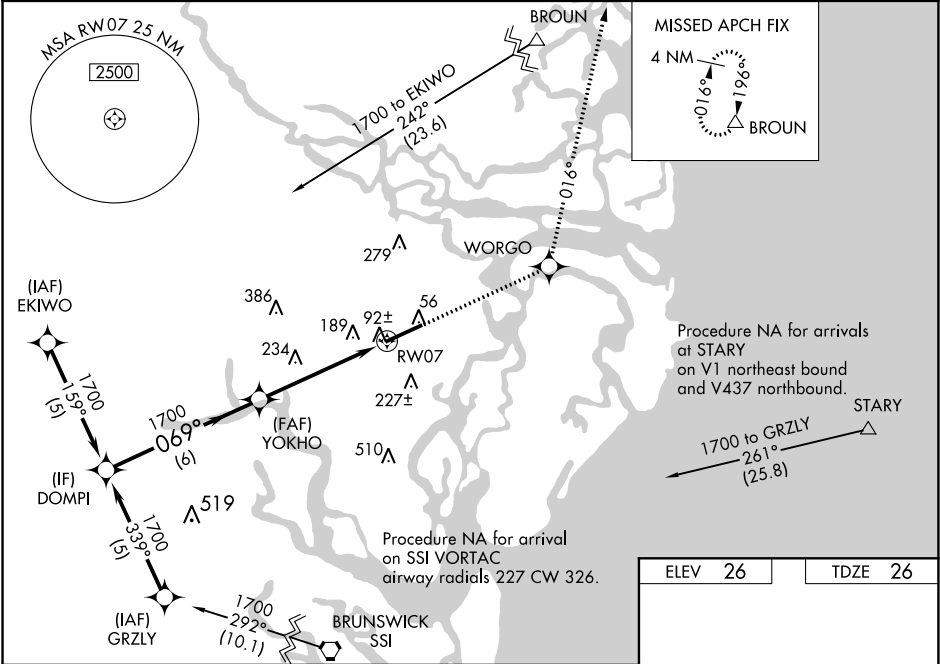

|                      |       |             |                        |                      |  |        |       |                 |       |
|----------------------|-------|-------------|------------------------|----------------------|--|--------|-------|-----------------|-------|
| Procedure Turn<br>NA |       | DOMPI       |                        | YOKHO                |  | 3000   | WORG0 | Ir 016°         | BROWN |
|                      |       | 1700        |                        | 1700                 |  | ↑      | ✦     | △               |       |
| GP 3.00°<br>TCH 58   |       | 1700        |                        | 069°                 |  | 1700   |       | 069°            |       |
|                      |       | 6 NM        |                        | 3.7 NM               |  | 1.3 NM |       | *1.3 NM to RW07 |       |
|                      |       | 6 NM        |                        | 3.7 NM               |  | 1.3 NM |       | *LNAV only.     |       |
| CATEGORY             | A     | B           | C                      | D                    |  |        |       |                 |       |
| LPV DA               | 226-½ |             | 200 (200-½)            |                      |  |        |       |                 |       |
| LNAV/<br>VNAV DA     | 486-⅞ |             | 460 (500-⅞)            |                      |  |        |       |                 |       |
| LNAV MDA             | 500-½ | 474 (500-½) | 500-1                  | 474 (500-1)          |  |        |       |                 |       |
| CIRCLING             | 540-1 | 514 (600-1) | 540-1½<br>514 (600-1½) | 580-2<br>554 (600-2) |  |        |       |                 |       |

