



WAAS CH <b>53531</b> <b>W26A</b>	APP CRS <b>260°</b>	Rwy Idg TDZE <b>4659</b> Apt Elev <b>4729</b>
--	------------------------	---

RNAV (GPS) RWY 26L  
PUEBLO MEMORIAL (PUB)



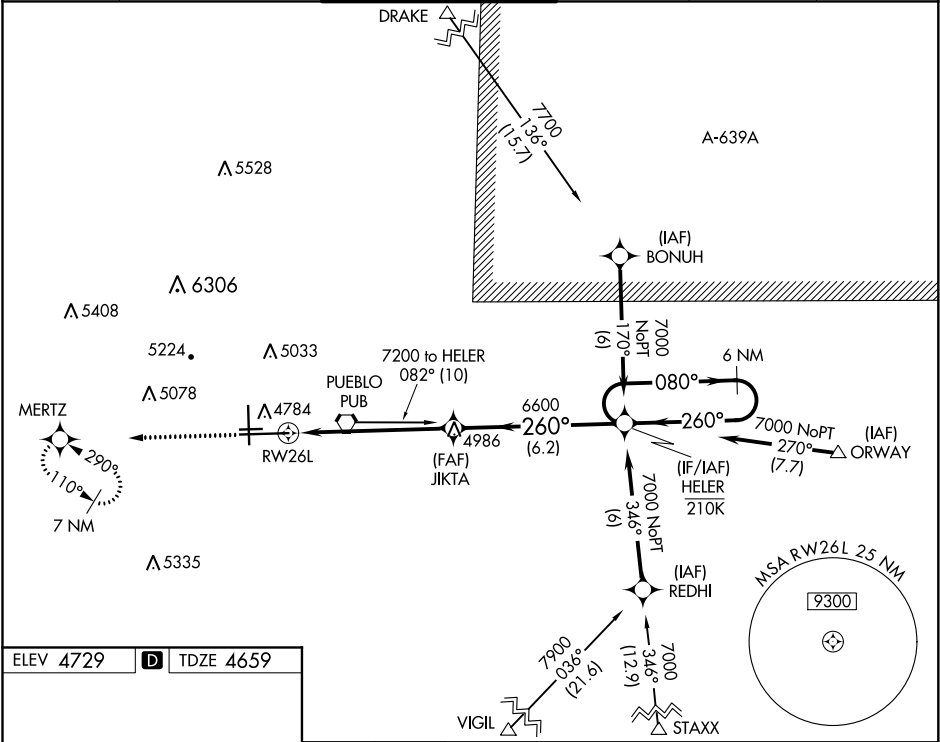


RNP APCH. ▼ For uncompensated Baro-VNAV systems, procedure NA below -22°C or above 47°C. ▲			MISSED APPROACH: Climb to 7000 direct MERTZ and hold.		
ATIS <b>125.25</b>	DENVER APP CON ★ <b>120.1 290.5</b>	PUEBLO TOWER ★ <b>119.1 (CTAF) 0 257.8</b>	GND CON <b>121.9</b>	CLNC DEL <b>120.9</b>	UNICOM <b>122.95</b>



ELEV 4729	D	TDZE 4659
-----------	---	-----------



HIRL Rwy 8R-26L	MRL Rws 17-35 and 8L-26R	REIL Rws 8L, 17, 26L, 26R and 35
-----------------	--------------------------	----------------------------------

7000		MERTZ		HELER		6 NM Holding Pattern	
							
*LNAV only		*1.4 NM to RW26L		JKTA 6600		080° → 7000 ← 260°	
		RW26L				GP 3.00° TCH 60	
1.4		4.5 NM		6.2 NM			
CATEGORY	A	B	C	D			
LPV DA	4859-3/4			200 (200-3/4)			
LNAV/VNAV DA	4979-1			320 (300-1)			
LNAV MDA	5100-1	441 (400-1)	5100-1 3/8	441 (400-1 3/8)			
 CIRCLING	5340-1	611 (700-1)	5560-2 1/2 831 (900-2 1/2)	5800-3 1071 (1100-3)			