

WAAS CH <b>50202</b> <b>W03A</b>	APP CRS <b>035°</b>	Rwy Idg <b>13001</b> TDZE <b>3667</b> Apt Elev <b>3671</b>
--	------------------------	--





# RNAV (GPS) RWY 3

## ROSWELL AIR CENTER (ROW)

**T** DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, **A** LNAV/VNAV NA below -22°C (-7°F) or above 41°C (106°F).  
**ASR** If local altimeter setting not received, use Artesia altimeter setting and increase all DAs/MDAs 100 feet. VDP and Baro-VNAV NA when using Artesia altimeter setting.

MISSED APPROACH: Climb to 6000 direct AQZED and hold.

ATIS 128.45 306.2	ROSWELL APP CON ★ 119.6 239.0	ROSWELL TOWER ★ 118.5 (CTAF) 0 233.7	GND CON 121.9 348.6	CLNC DEL 132.875 282.25	UNICOM 122.95
----------------------	----------------------------------	---	------------------------	----------------------------	------------------

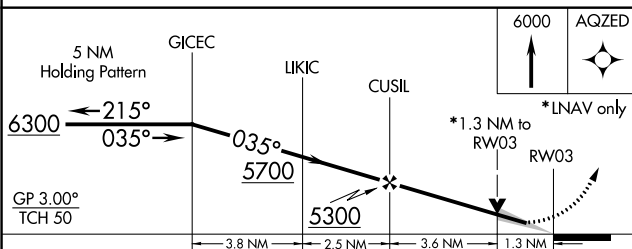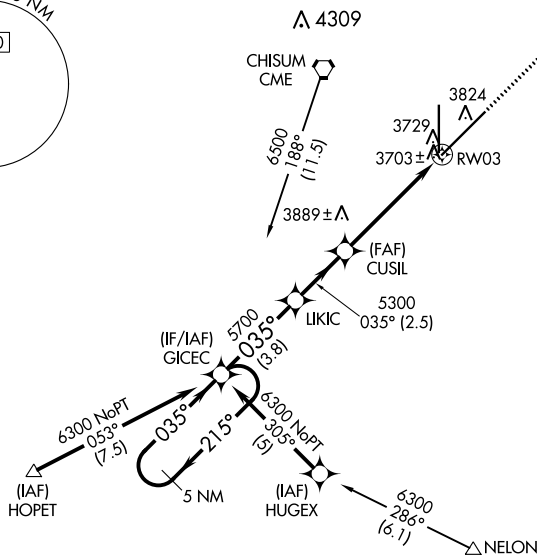

CATEGORY		A	B	C	D
LPV	DA	3917- $\frac{3}{4}$ 250 (300- $\frac{3}{4}$ )			
LNAV/ VNAV	DA	3987-1 320 (400-1)			
LNAV	MDA	4140-1	473 (500-1)	4140-1 $\frac{1}{4}$ 473 (500-1 $\frac{1}{4}$ )	4140-1 $\frac{1}{2}$ 473 (500-1 $\frac{1}{2}$ )
CIRCLING		4140-1	469 (500-1)	4140-1 $\frac{1}{2}$ 469 (500-1 $\frac{1}{2}$ )	4240-2 569 (600-2)

