

WAAS CH 73008 W15A	APP CRS 151°	Rwy Idg 5431 TDZE 352 Apt Elev 352
--	------------------------	---



RNAV (GPS) RWY 15
RED BLUFF MUNI (RBL)


RNP APCH.

T Circling to Rwy 33 NA at night. Baro-VNAV and VDP NA when using Redding altimeter setting. **A** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. When local altimeter setting not received; use Redding altimeter setting and increase LPV DA to 674 feet and increase LNAV/VNAV DA to 860 feet and increase visibility all Cats 1/8 SM; increase all MDAs 80 feet and LNAV visibility Cats C/D 1/8 SM and Circling visibility Cats C/D 1/4 SM.

MISSED APPROACH: Climb to 3500 direct TOWAN and hold.

ASOS 120.775	OAKLAND CENTER 132.2 350.3	UNICOM 123.0 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

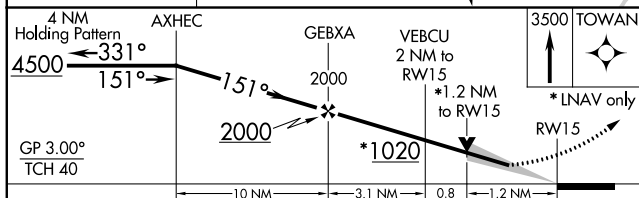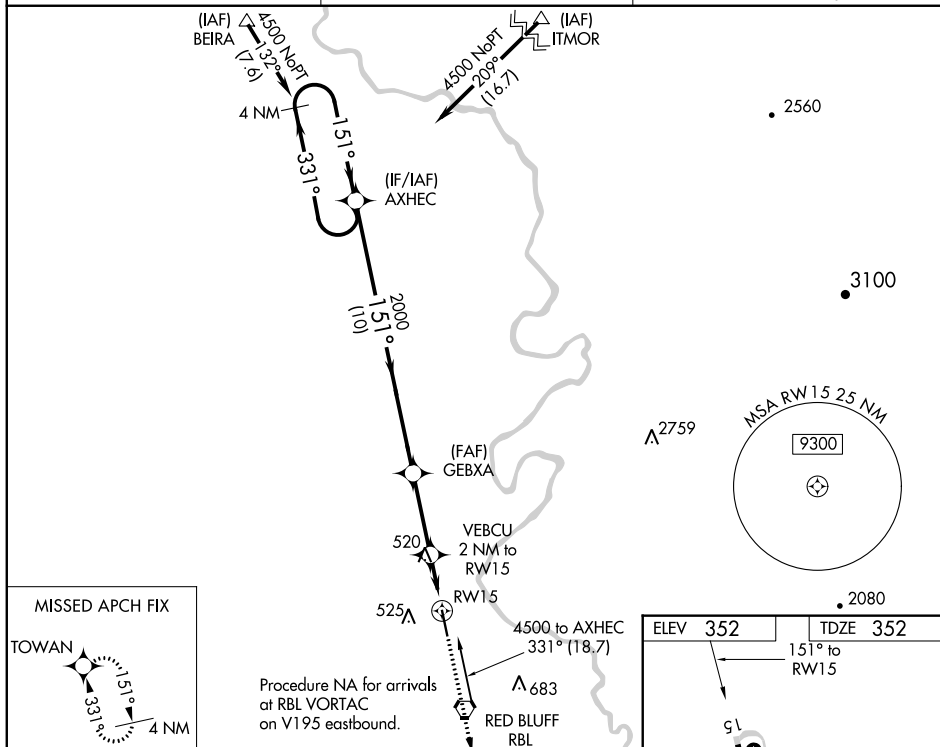

CATEGORY		A	B	C	D
LPV	DA	602-7/8 250 (300-7/8)			
LNAV/ VNAV	DA	788-1 1/4 436 (500-1 1/4)			
LNAV	MDA	780-1 428 (500-1)		780-1 1/4 428 (500-1 1/4)	
 CIRCLING		860-1 508 (600-1)		900-1 1/2 548 (600-1 1/2)	1060-2 1/4 708 (800-2 1/4)

