D-ATIS
113.7 115.8 118.85
CLNC DEL
118.2
CPDLC
GND CON
121.8
SAN FRANCISCO TOWER
120.5 269.1
NORCAL DEP CON
135.1 307.2

**TOP ALTITUDE: 3000**

## DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 28L/R: Climb heading 284° to 520, then direct WESLA at or above 2000 at or below 230K, then left turn direct PORTE, thence . . . .

. . . . on (transition) maintain 3000, expect filed altitude 10 minutes after departure.

CISKO TRANSITION (WESLA4.CISKO)
EBAYE TRANSITION (WESLA4.EBAYE)
LOSHN TRANSITION (WESLA4.LOSHN)
NTELL TRANSITION (WESLA4.NTELL)
YYUNG TRANSITION (WESLA4.YYUNG)




TAKEOFF MINIMUMS
Rwys 1L/R, 10L/R, 19L/R: NA-ATC.
Rwys 28L/R: Standard with minimum climb of 500' per NM to 2000.

NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.
NOTE: RADAR required for non-GPS equipped aircraft.
NOTE: Do not exceed 210K until leaving 520 feet.

NOTE: Chart not to scale.

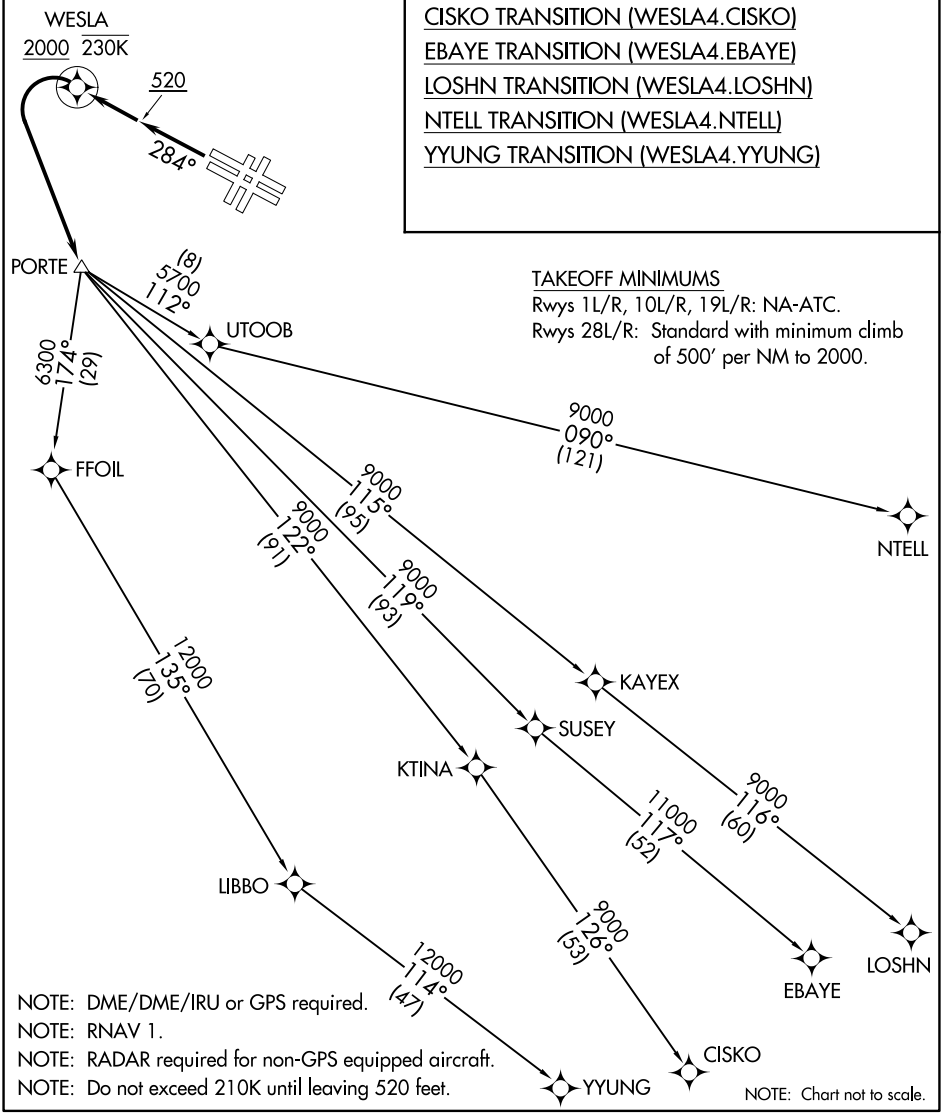

SW-2, 03 DEC 2020 to 31 DEC 2020
SW-2, 03 DEC 2020 to 31 DEC 2020