WAAS CH 72623 W07A	APP CRS 075°	Rwy Idg 5954 TDZE 37 Apt Elev 45

RNAV (GPS) RWY 7

OXNARD (OXR)

Baro-VNAV NA when using Camarillo altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP -0.3 NA. When local altimeter setting not received, use Camarillo altimeter setting and increase all DA 18 feet and all MDA 20 feet, increase Circling Cat D visibility ¼ mile.

MISSED APPROACH: Climb to 500, then climbing right turn to 3000 direct UVICA and hold.

ATIS	POINT MUGU APP CON★	OXNARD TOWER★	GND CON
118.05	124.7 335.5	134.95 (CTAF) L 257.8	121.9

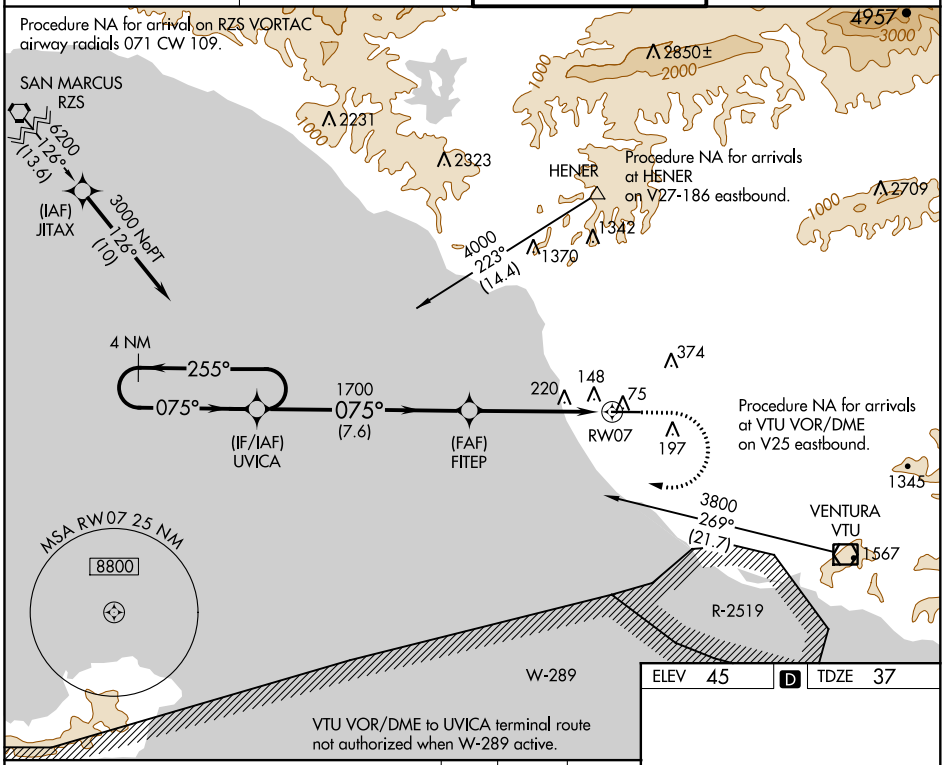

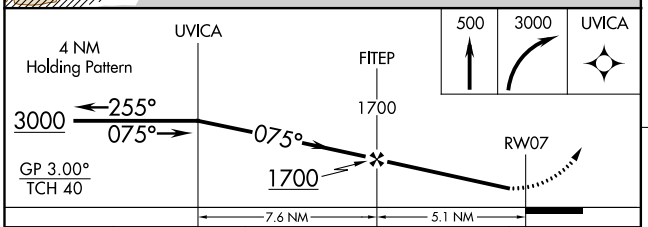

CATEGORY	A	B	C	D
LPV DA		287-1	250 (300-1)	
LNAV/VNAV DA		319-1	282 (300-1)	
LNAV MDA	480-1	443 (500-1)	480-1⅜	443 (500-1⅜)
CIRCLING	500-1	455 (500-1)	500-1½ 455 (500-1½)	700-2 655 (700-2)

ELEV 45 D TDZE 37



REIL Rwy 7 L
MIRL Rwy 7-25 L

SW-3, 03 DEC 2020 to 31 DEC 2020
SW-3, 03 DEC 2020 to 31 DEC 2020