YUMA PROVING GROUND, ARIZONA

# VOR RWY 6

| VORTAC BZA | APCH CRS | Rwy Idg 6000 |
|---|---|---|
| 116.8 | 048° | TDZE 387 |
| Chan 115 | | Arpt Elev 433 |

AL-6341 [USA]

LAGUNA AAF (KLGF)

* Straight-in minima not authorized at night.

NA

MISSED APPROACH: Climbing right turn to 3200 direct BZA VORTAC and hold.

| YUMA APP CON | LAGUNA TOWER ★ | GND CON |
|---|---|---|
| 124.7 374.8 | 126.2 (CTAF) 242.175 | 121.8 (L) 229.4 |

Procedure not authorized when airfield closed.

Obtain local altimeter setting on CTAF.
When not received, use Yuma MCAS Intl altimeter setting.










| ELEV 433 | TDZE 387 |
|---|---|

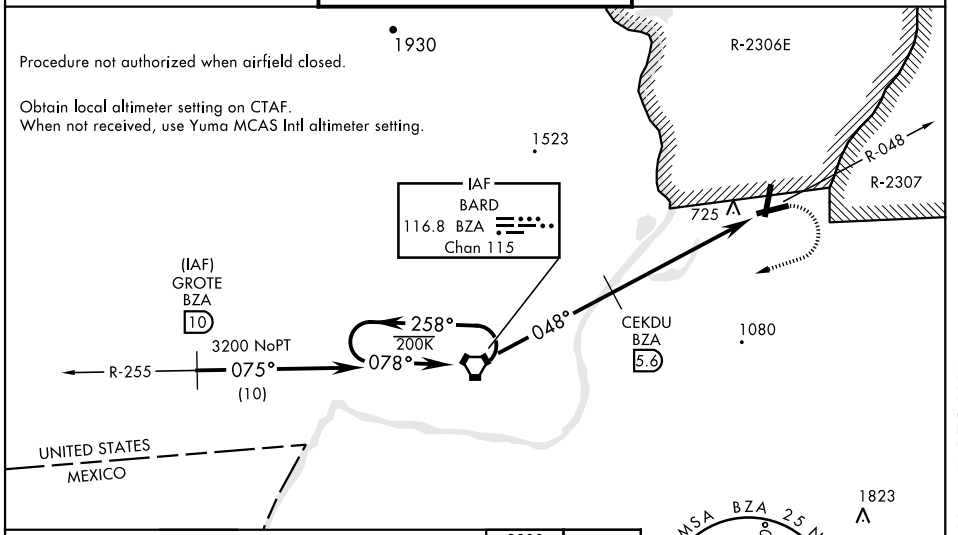


MIRL Rwy 18-36 (L)
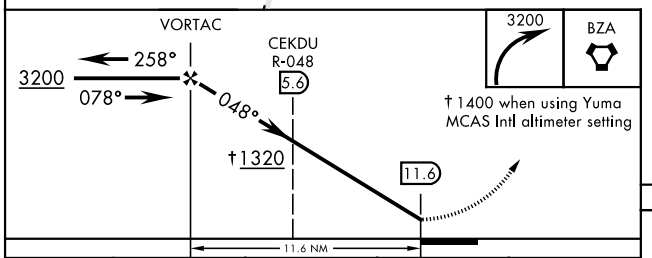
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-6 * | 1320-1¼ 933 (900-1 ¼) | | 1320-2¾ 933 (900-2¾) | 1320-3 933 (900-3) |
| CIRCLING | 1320-1¼ 887 (900-1¼) | | 1320-2¾ 887 (900-2¾) | 1320-3 887 (900-3) |
| DME MINIMA | | | | |
| S-6 * | 1040-1 653 (700-1) | | 1040-1¾ 653 (700-1¾) | 1040-2 653 (700-2) |
| CIRCLING | 1080-1 647 (700-1) | | 1080-1¾ 647 (700-1¾) | 1080-2 647 (700-2) |
| YUMA MCAS/YUMA Intl ALTIMETER SETTING | | | | |
| S-6 * | 1400-1¼ 1013 (1000-1¼) | 1400-1½ 1013 (1000-1½) | 1400-3 1013 (1000-3) | |
| CIRCLING | 1400-1¼ 967 (1000-1¼) | 1400-1½ 967 (1000-1½) | 1400-3 967 (1000-3) | |
| YUMA MCAS/YUMA Intl ALTIMETER SETTING DME MINIMA | | | | |
| S-6 * | 1120-1 733 (700-1) | 1120-1¼ 733 (700-1¼) | 1120-2¼ 733 (700-2¼) | 1120-2½ 733 (700-2½) |
| CIRCLING | 1160-1 727 (800-1) | | 1160-2 727 (800-2) | 1160-2¼ 727 (800-2¼) |

| FAF to MAP 11.6 NM | | | | | |
|---|---|---|---|---|---|
| Knots | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | 11:36 | 7:44 | 5:48 | 4:38 | 3:52 |

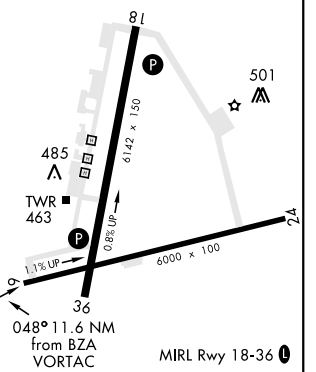

SW-4, 03 DEC 2020 to 31 DEC 2020
SW-4, 03 DEC 2020 to 31 DEC 2020