


AWOS-3P
121.55
ANCHORAGE CENTER
133.3 290.4
CTAF
123.0

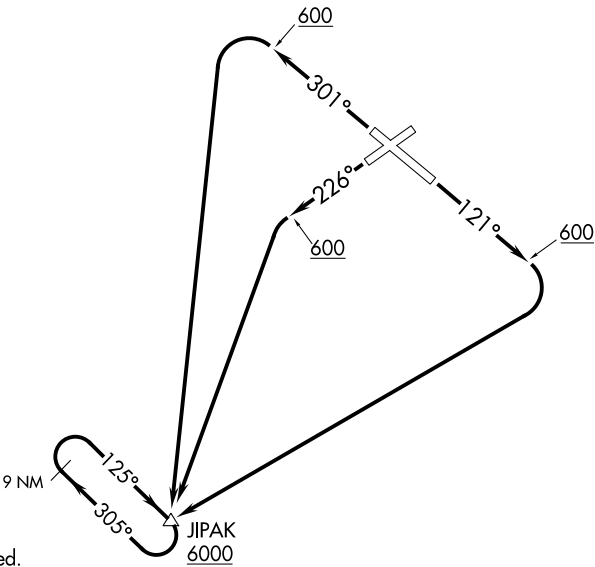

NOTE: GPS required.
NOTE: RNAV 1.

TAKEOFF MINIMUMS

- Rwy 5: NA-Terrain.
- Rwys 12, 23: Standard.
- Rwy 30: 400-2 3/4 or standard with minimum climb of 280' per NM to 600.

TAKEOFF OBSTACLE NOTES

- Rwy 12: Bush 153' from DER, 373' right of centerline, 15' AGL/40' MSL.
- Rwy 23: Terrain 103' from DER, 300' right of centerline, 69' MSL.
Pole 263' from DER, 542' right of centerline, 35' AGL/60' MSL.
Vehicles on road 135' from DER, 440' left of centerline, 14' AGL/39' MSL.
- Rwy 30: Terrain beginning 142' from DER, left and right of centerline, up to 85' MSL.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

- TAKEOFF RUNWAY 12: Climb heading 121° to 600 then right turn direct JIPAK, thence. . .
 - TAKEOFF RUNWAY 23: Climb heading 226° to 600 then left turn direct JIPAK, thence. . .
 - TAKEOFF RUNWAY 30: Climb heading 301° to 600 then left turn direct JIPAK, thence. . .
- . . . continue climb in hold at JIPAK to at or above 6000 before proceeding on course.