WAAS	APP CRS	Rwy Idg	4000
CH 58310	303°	TDZE	42
W30A		Apt Elev	42

RNAV (GPS) RWY 30

QUINHAGAK (AQH) (PAQH)

-36°C

DME/DME RNP-0.3 NA. Procedure NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 51°C (124°F). Baro-VNAV and VDP NA when using Kipnuk altimeter setting. When local altimeter setting not received, use Kipnuk altimeter setting and increase all DA and MDA 160 feet; increase LPV all Cats visibility and LNAV/VNAV all Cats visibility ⅜ mile, increase LNAV Cats C, D visibility ¼ mile, increase Circling Cat C visibility ½ mile, increase Circling Cat D visibility ¼ mile.

MISSED APPROACH: Climb to 2500 direct HOTKU and hold.

AWOS-3P	ANCHORAGE CENTER	KENAI RADIO	UNICOM
121.575	125.2 372.0	122.1	122.8 (CTAF) L

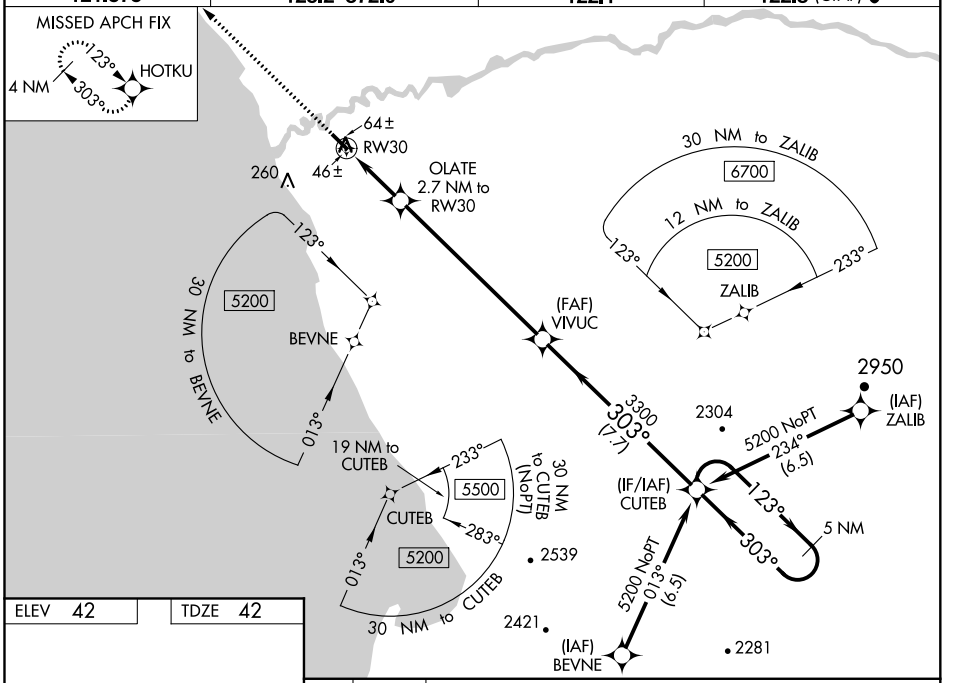

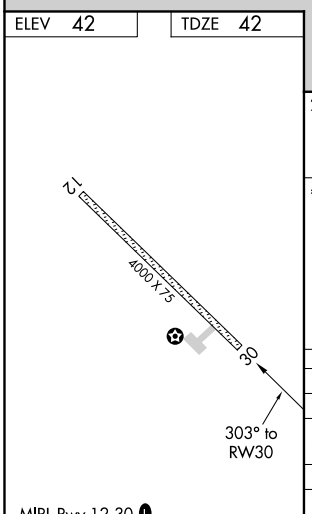

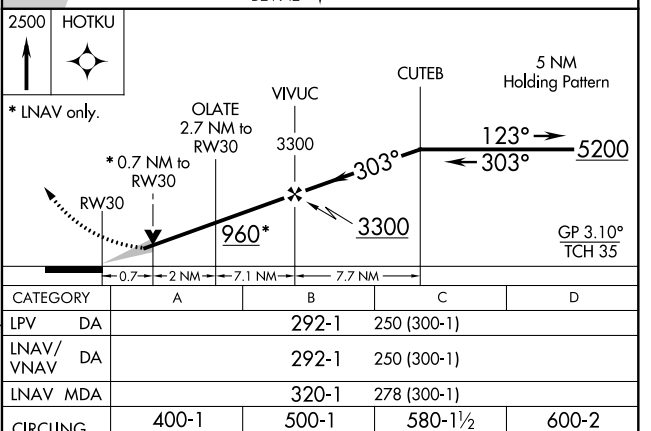

CATEGORY	A	B	C	D
LPV DA	292-1		250 (300-1)	
LNAV/VNAV DA	292-1		250 (300-1)	
LNAV MDA	320-1		278 (300-1)	
CIRCLING	400-1 358 (400-1)	500-1 458 (500-1)	580-1½ 538 (600-1½)	600-2 558 (600-2)

AK, 31 DEC 2020 to 25 FEB 2021
AK, 31 DEC 2020 to 25 FEB 2021