

LOC/DME I-DTW

110.7

Chan **44**

APP CRS

036°

Rwy Idg

11494

TDZE

640

Apt Elev

645

ILS or LOC RWY 4R

DETROIT METROPOLITAN WAYNE COUNTY (DTW)

RNAV 1-GPS.
CLEVR, CAATZ and ELDNN: RNAV 1-DME/DME/IRU or GPS required.
Aircraft not DME/DME/IRU or GPS equipped - RADAR required for procedure entry.
DME or RADAR required.

ALSF-2

MISSED APPROACH: Climb to 4000 on DXO VOR/DME R-035 to LUPAY/DXO VOR/DME/15.6 DME and hold.

Simultaneous approach authorized. For inop ALS, increase S-LOC 4R Cat C/D visibility to RVR 6000.


D-ATIS 133.675	DETROIT APP CON 124.05 284.0	METRO TOWER 128.125 317.725	121.8 GND CON (NW) 132.725 (SW)	119.45 (NE) 119.25 (SE)	CLNC DEL 120.65	CPDLC
--------------------------	--	---------------------------------------	--	--	---------------------------	-------

ALTERNATE MISSED APCH FIX

LOCALIZER 110.7
I-DTW
Chan 44

MISSED APCH FIX

LUPAY
DXO 15.6

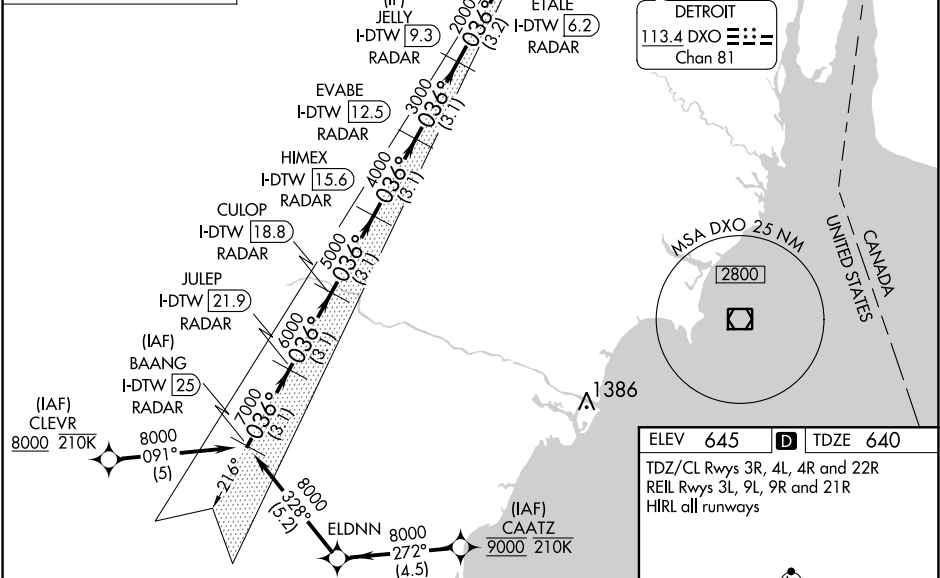

	BAANG I-DTW 25 RADAR	JULEP I-DTW 21.9 RADAR	CULOP I-DTW 18.8 RADAR	HIMEX I-DTW 15.6 RADAR	EVABE I-DTW 12.5 RADAR	JELLY I-DTW 9.3 RADAR	ETALE I-DTW 6.2 RADAR	DXO R-035	LUPAY DXO 15.6
8000									
7000									
6000									
5000									
4000									
3000									
2000									
GS 3.00° TCH 52									
3.1 NM	3.1 NM	3.1 NM	3.1 NM	3.1 NM	3.2 NM	3 NM	0.9 NM	0.2 NM	
CATEGORY	A	B	C	D					
S-ILS 4R	840/18				200 (200-1/2)				
S-LOC 4R	1040/24	400 (400-1/2)	1040/35		400 (400-5/8)				
CIRCLING	1180-1	535 (600-1)	1180-1 1/2		535 (600-1 1/2)	1240-2		595 (600-2)	

