

WAAS CH 70642 W22D	APP CRS 216°	Rwy Idg 10000 TDZE 642 Apt Elev 645
--	------------------------	--

RNAV (GPS) Z RWY 22R

DETROIT METROPOLITAN WAYNE COUNTY (DTW)


RNP APCH.

Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.

MALSR

MISSED APPROACH: Climb to 1100 then dimbing right turn 4000 direct DOHNT and hold, continue climb in hold to 4000.

D-ATIS 133.675	DETROIT APP CON 124.05 284.0	METRO TOWER 128.125 317.725	GND CON 121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)	CLNC DEL 120.65	CPDLC
--------------------------	--	---------------------------------------	---	---------------------------	-------

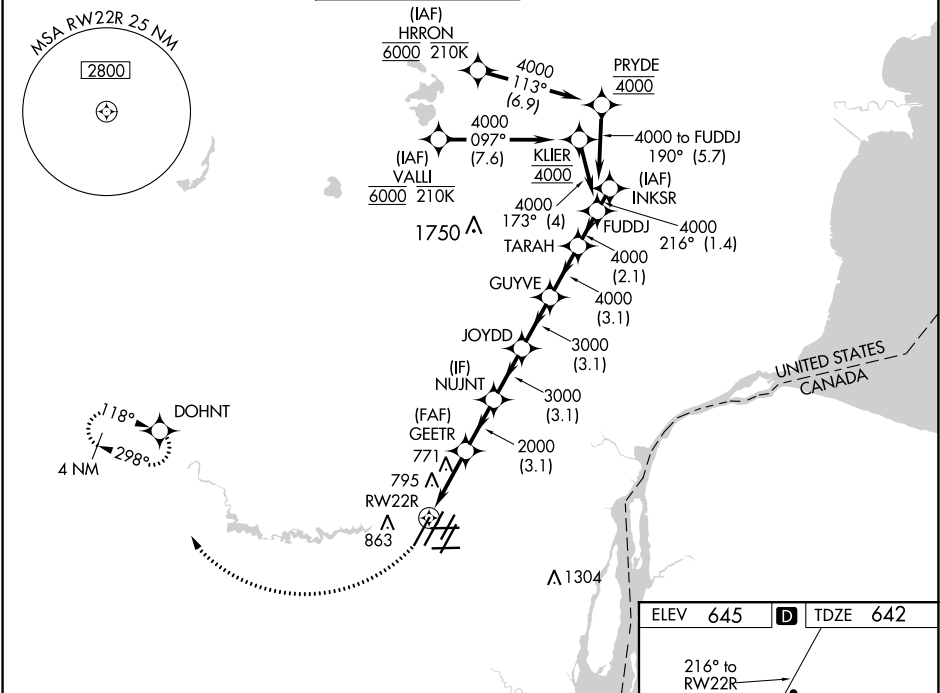

1100

4000

DOHNT

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/ TCH 71)

*LNAV only.	
RW22R	
GEETR 2000	
NUJNT JOYDD	
GUYVE TARA FUDDJ	
216° 4000	
GP 3.00° TCH 55	
CATEGORY	A B C D
LPV DA	842/18 200 (200-½)
LNAV/ VNAV DA	948/24 306 (400-½)
LNAV MDA	1040/24 398 (400-½) 1040/35 398 (400-⅝)
CIRCLING	1180-1 535 (600-1) 1180-1½ 535 (600-½) 1240-2 595 (600-2)

