


WAAS CH 97431 W01A	APP CRS 013°	Rwy Idg TDZE 1180 Apt Elev 1204
--	------------------------	---

RNAV (GPS) RWY 1
SAWYER INTL (SAW)

RNP APCH.	MALSR	MISSED APPROACH: Climb to 3500 direct ZUCTI and hold.
▼ For inop ALS, increase LNAV Cat C/D visibility to 1½ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.		

AWOS-3 118.375	MINNEAPOLIS CENTER 119.1 290.2	SAWYER TOWER ★ 119.975 (CTAF) 0	GND CON 121.65	UNICOM 122.7
--------------------------	--	---	--------------------------	------------------------

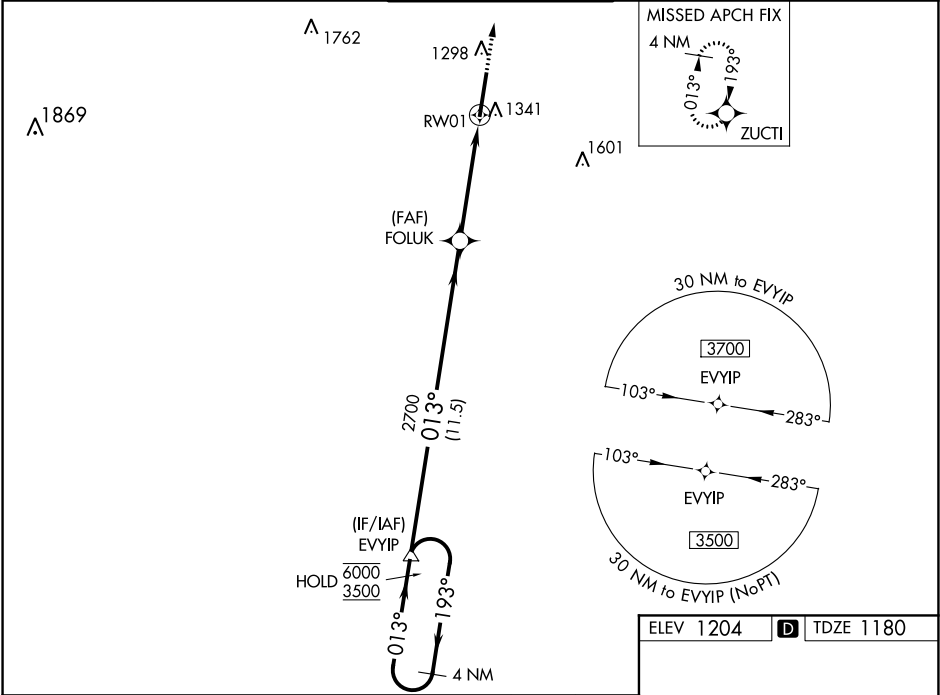

4 NM Holding Pattern				
GP 3.00° TCH 50				
11.5 NM 3.4 NM 1.2 NM				
CATEGORY	A	B	C	D
LPV DA		1380-½	200 (200-½)	
LNAV/VNAV DA		1503-½	323 (300-½)	
LNAV MDA	1600-½	420 (400-½)	1600-¾	420 (400-¾)
CIRCLING	1680-1	476 (500-1)	1820-1¾ 616 (700-1¾)	1820-2 616 (700-2)

