
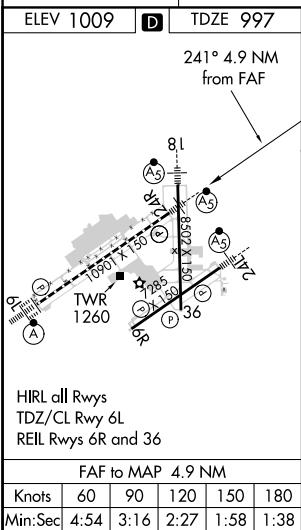


LOC/DME I-VUQ 111.9 Chan 56	APP CRS 241°	Rwy ldg 10900 TDZE 997 Apt Elev 1009
---	------------------------	---

ILS or LOC RWY 24R
JAMES M COX DAYTON INTL (DAY)

Simultaneous approach authorized. For inop MALSRL, increase S-LOC 24R Cat C/D visibility to RVR 6000.		MALSRL 	MISSED APPROACH: Climb to 3000 then right turn direct DQN VOR/DME and hold.	
ATIS 125.8	COLUMBUS APP CON 118.425 323.15	DAYTON TOWER 119.9 257.7	GND CON 121.9	CLNC DEL 121.75

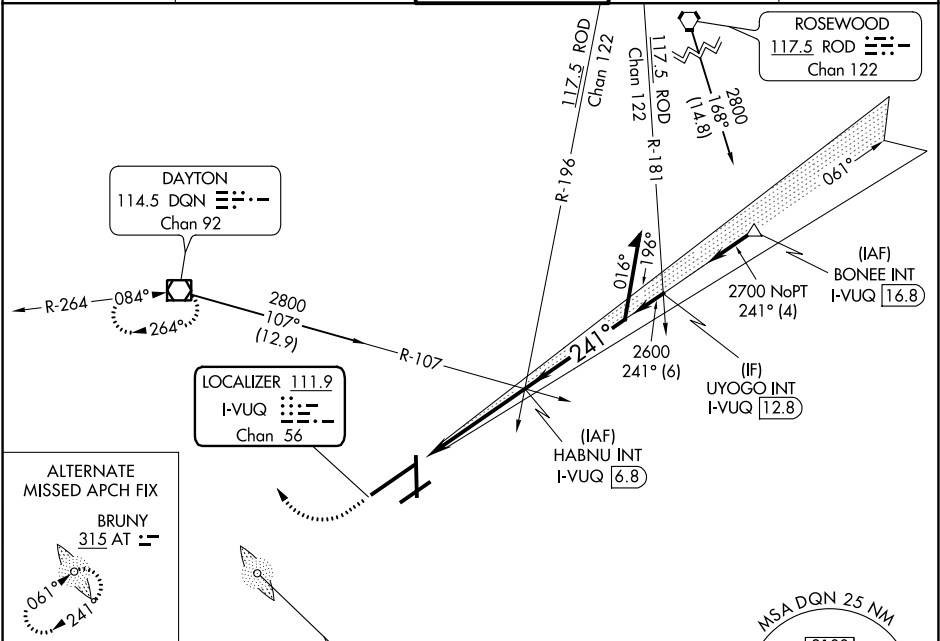

LOM

BRUNY

315 AT

A 2049

3000

DQN

*LOC only

HABNU INT

I-VUQ 6.8

Remain within 10 NM

CATEGORY	A	B	C	D
S-ILS 24R	1203/24 206 (200-½)			
S-LOC 24R	1400/24	403 (400-½)	1400/40	403 (400-¾)
CIRCLING	1580-1	571 (600-1)	1580-1½ 571 (600-½)	1640-2 631 (700-2)