RNAV (GPS) RWY 32

FREEMAN MUNI (SER)

WAAS	APP CRS	Rwy ldg	5502
CH 99403	316°	TDZE	574
W32A		Apt Elev	583

RNP APCH.

NA

Baro-VNAV NA when using Louisville Muhammad Ali Intl altimeter setting. When local altimeter setting not received, use Louisville Muhammad Ali Intl altimeter setting and increase all DA 117 feet and all MDA 120 feet; increase LPV all Cats, LNAV/VNAV all Cats and LNAV Cat C/D visibility ⅜ mile and Circling Cat C/D visibility ½ mile. VDP NA with Louisville Muhammad Ali Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 32 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2600 direct RUYOT and hold.

AWOS-3	INDIANAPOLIS CENTER	UNICOM
119.425	124.775 269.45	122.8 (CTAF) L

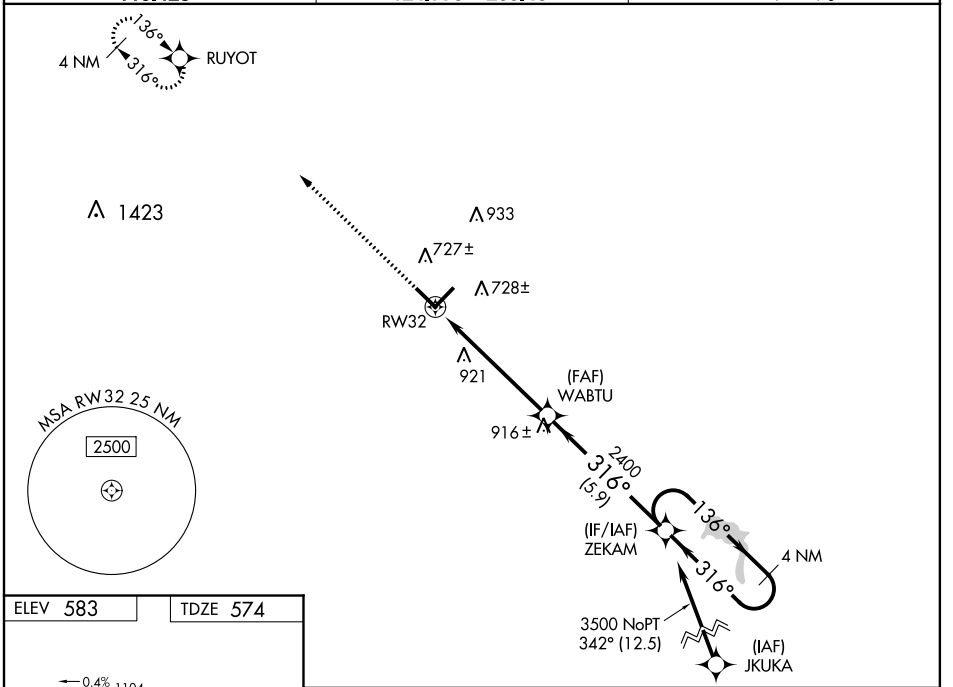

ELEV 583 TDZE 574



MIRL Rwys 5-23 and 14-32 L
REIL Rwys 5, 14, 23 and 32 L

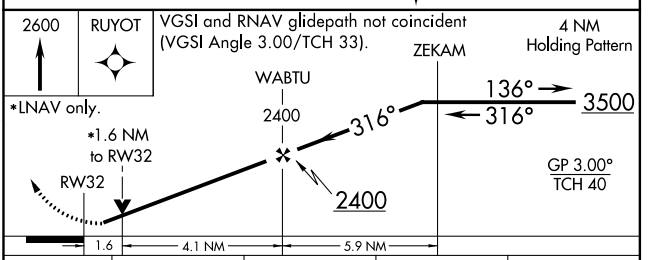

CATEGORY	A	B	C	D
LPV DA	859-1 285 (300-1)			
LNAV/VNAV DA	853-1 279 (300-1)			
LNAV MDA	1140-1 566 (600-1)		1140-1⅝ 566 (600-1⅝)	
C CIRCLING	1140-1 557 (600-1)		1300-2 717 (800-2)	1300-2¼ 717 (800-2¼)

EC-2, 31 DEC 2020 to 28 JAN 2021
EC-2, 31 DEC 2020 to 28 JAN 2021