

| | | | |
|-------------|---------|----------|-----|
| VOR/DME DJB | APP CRS | Rwy Idg | N/A |
| 113.6 | 070° | TDZE | N/A |
| Chan 83 | | Apt Elev | 793 |

VOR-A

LORAIN COUNTY RGNL (LPR)



⚠

When local altimeter setting not received, use Cleveland-Hopkins Intl altimeter setting and increase all MDA 40 feet, increase circling Cat C/D visibility ¼ mile.

MISSED APPROACH:

Climbing left turn to 3000 via heading 029° and DJB VOR/DME R-029 direct OTOCE INT and hold.

| | | | |
|-----------------|-------------------------------------|-------------------|--------------------------|
| ASOS 121.425 | CLEVELAND APP CON 126.35 346.325 | CLNC DEL 125.7 | UNICOM 122.7 (CTAF) 0 |
|-----------------|-------------------------------------|-------------------|--------------------------|

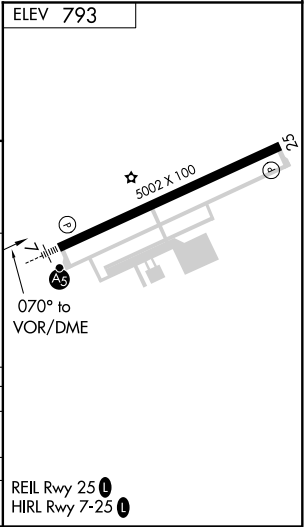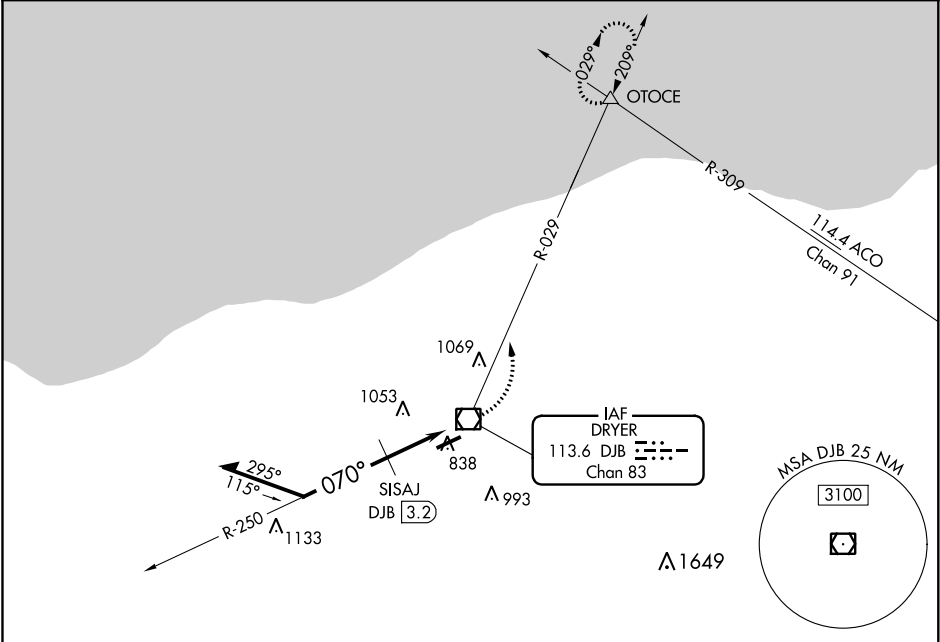

| | | | | |
|---------------------|-----------------------|---|-------------------------------|-----------------------|
| Remain within 10 NM | | 3000 hdg 029° | DJB R-029 | OTOCE |
| | | *1480 when using Cleveland-Hopkins altimeter setting. | | |
| CATEGORY | A | B | C | D |
| CIRCLING | 1440-1 | 647 (700-1) | 1440-1 3/4 647 (700-1 3/4) | 1440-2 647 (700-2) |
| SISAJ DME MINIMUMS | | | | |
| CIRCLING | 1300-1 507 (600-1) | 1360-1 567 (600-1) | 1420-1 3/4 627 (700-1 3/4) | 1420-2 627 (700-2) |